

Signet 515/2536 Rotor-X Flow Sensors



3-0515.090 Rev. 27 03/20

Operating Instructions

515 Sensor
(with red cap)8510 Integral
Sensor2536 Sensor
(with blue cap)8512 Integral
Sensor2536 Sensor
(with grey cap)

- [English](#)
- [Deutsch](#)
- [Français](#)
- [Español](#)
- [中文](#)
- [한국어](#)



Description

Operating Instructions for all versions of 515/8510 and 2536/8512

Simple to install with time-honored reliable performance, Signet 515 and 2536 Rotor-X Paddlewheel Flow Sensors are highly repeatable, rugged sensors that offer exceptional value with little or no maintenance.

Signet 515 and 2536 sensors measure liquid flow rates in full pipes and can be used in low pressure systems.

- The many material choices including PP, PVDF, and PVC (2536 only) make this model highly versatile and chemically compatible with many liquid process solutions.
- Sensors can be installed in DN15 to DN900 (½ to 36 in.) using Signet's comprehensive line of custom fittings, except the PVC 2536 version which can be installed in DN15 to DN100 (½ to 4 in.) pipes using Signet's comprehensive line of custom fittings as well.
- These custom fittings, which include tees, saddles, and weldolets, seat the sensor to the proper insertion depth into the process flow.
- The sensors are also offered in configurations for wet-tap installation requirements except 2536 PVC version.

515/8510 Advantages:

- Flow rate range 0.3 to 6 m/s (1 to 20 ft/s)
- Installs into pipe sizes DN15 to DN900 (½ to 36 in.)
- Wide Turndown Ratio of 20:1
- Self-powered
- Highly repeatable output
- Chemically resistant materials
- Easy to replace rotor

2536/8512 Advantages:

- Flow rate range 0.1 to 6 m/s (0.3 to 20 ft/s)
- Installs into pipe sizes DN15 to DN900 (½ to 36 in.)
- The 2536 PVC version installs into pipe sizes DN15 to DN100 (½ to 4 in.) for concentrated Sodium Hypochlorite 12.5% applications
- Wide Turndown Ratio of 66:1
- Open-collector output
- High resolution and noise immunity
- Chemically resistant materials
- Easy to replace rotor
- Sodium Hypochlorite transfer/injection/batching (3-2536-U0)

Warranty Information

Refer to your local Georg Fischer Sales office for the most current warranty statement.

All warranty and non-warranty repairs being returned must include a fully completed Service Form and goods must be returned to your local GF Sales office or distributor. Product returned without a Service Form may not be warranty replaced or repaired.

Signet products with limited shelf-life (e.g. pH, ORP, chlorine electrodes, calibration solutions; e.g. pH buffers, turbidity standards or other solutions) are warranted out of box but not warranted against any damage, due to process or application failures (e.g. high temperature, chemical poisoning, dry-out) or mishandling (e.g. broken glass, damaged membrane, freezing and/or extreme temperatures).

Product Registration







Thank you for purchasing the Signet line of Georg Fischer measurement products.

If you would like to register your product(s), you can now register online in one of the following ways:

- Visit our website www.gfsignet.com. Under **Service and Support** click on **Product Registration Form**
- If this is a pdf manual (digital copy), [click here](#)

Safety Information

1. Depressurize and vent system prior to installation or removal.
2. Confirm chemical compatibility before use.
3. DO NOT exceed maximum temperature or pressure specs.
4. ALWAYS wear safety goggles or faceshield during installation and/or service.
5. DO NOT alter product construction.
Below are Safety Instructions from the pipe fittings instruction sheet:
6. Do not use this product for any purpose other than for which it was designed.
7. Use with liquids only.

| | |
|---|---|
|  | Warning / Caution / Danger Indicates a potential hazard. Failure to follow all warnings may lead to equipment damage, injury, or death |
|  | Personal Protective Equipment (PPE) Always utilize the most appropriate PPE during installation and service of Signet products. |
|  | Pressurized System Warning Sensor may be under pressure, take caution to vent system prior to installation or removal. Failure to do so may result in equipment damage and/or serious injury. |
|  | Hand Tighten Only Overtightening may permanently damage product threads and lead to failure of the retaining nut. |
|  | Do Not Use Tools Use of tool(s) may damage product beyond repair and potentially void product warranty. |
|  | Note / Technical Notes Highlights additional information or detailed procedure. |

Chemical Compatibility

Georg Fischer Signet products are manufactured in a variety of wetted materials to suit various liquids and chemicals.

All plastic materials including typical piping types (PVC, PVDF, PP and PE) are more or less permeable to contained media, such as water or volatile substances, including some acids. This effect is not related to porosity, but purely a matter of gas diffusion through the plastic.

If the plastic material is compatible with the medium according to the application guidelines, the permeation will not damage the plastic itself. However, if the plastic encloses other sensitive components, as is the case with GF Signet plastic paddlewheel sensors, these may be affected or damaged by the media diffusing through the plastic body and rotor.


Failures of PVDF paddlewheel sensors when used in hot nitric acid applications have been reported. PVDF is known to allow for substantial permeation of nitric acid constituents without being damaged itself. No clear guideline can be given here, since the damaging effect to the sensor is highly dependent on temperature, pressure and concentration.

Utilizing sensors in applications with aggressive substances is possible. On special request GF Signet can provide sensors with a different internal resin encapsulation (potting) that will delay the damaging effect of acids to the sensors.

For all Special Product inquiries or to place an order, please email signet-specialproduct@georgfischer.com.



WARNING!



Paddlewheel Retaining Nuts:

Red (515), Blue (2536), and Gray (2536)

The retaining nuts of paddlewheel sensors are not designed for prolonged contact with aggressive substances. Strong acids, caustic substances and solvents or their vapor may lead to failure of the retaining nut, ejection of the sensor and loss of the process fluid with possibly serious consequences, such as damage to equipment and serious personal injury. Retaining nuts that may have been in contact with such substances, e.g. due to leakage or spilling, must be replaced.

Paddlewheel Maintenance:

Paddlewheel flow sensors are subject to wear and may require maintenance and replacement of mechanical parts (rotors, pin, O-rings, bearings, retainers, etc.). The frequency of recommended maintenance will vary based upon application specifications, characteristics of the measured fluid, and installation details. These can include, but are not limited to: process flowrate, occurrence of water hammer, fluid corrosiveness and abrasiveness, sensor installation relevant to other equipment.

GF Signet offers individual replacement parts and rotor replacement kits, which include replacement instructions, allowing customers to perform field maintenance and reduce application down-time. Please refer to the Paddlewheel Replacement section (page 5) or contact your local GF Sales Representative with any questions.

515, 2536, 8510, 8512, 2537 Only:


To support our customers, the GF Signet Repair Department offers services to recertify the plastic paddlewheel products to factory specification. Contact your distributor or visit www.gfsignet.com for more information.

Table of Contents

| | |
|---------------------------------------|----|
| Description..... | 1 |
| Warranty Statement..... | 2 |
| Product Registration..... | 2 |
| Safety Information..... | 2 |
| Chemical Compatibility..... | 2 |
| Dimensions..... | 3 |
| Specifications..... | 4 |
| Location of Fitting..... | 5 |
| Sensor Mounting Position..... | 5 |
| Standard Sensor Installation..... | 5 |
| Rotor Replacement Procedure..... | 5 |
| Sensor Wiring..... | 6 |
| H-Dimensions..... | 6 |
| K-Factors..... | 7 |
| Signet Fittings..... | 11 |
| Ordering Information (515/8510)..... | 11 |
| Ordering Information (2536/8512)..... | 12 |

Dimensions

515/2536 Sensor

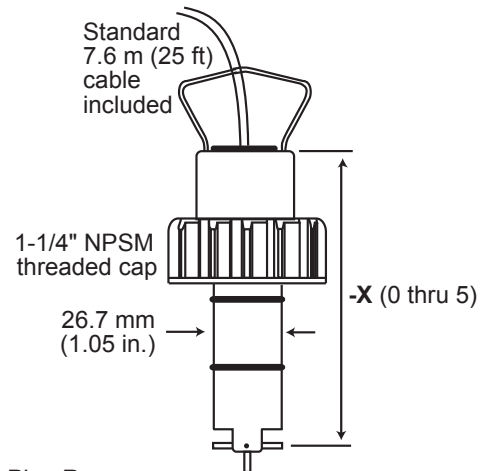


Pipe Range:

| | | |
|------------------|-------------------------|----------------------|
| 1/2 in. to 4 in. | -X0 = 104 mm (4.1 in.) | } Wet-tap Lengths |
| 5 in. to 8 in. | -X1 = 137 mm (5.4 in.) | |
| 10 in. and up | -X2 = 213 mm (8.4 in.) | |
| 1/2 in. to 4 in. | -X3 = 297 mm (11.7 in.) | |
| 5 in. to 8 in. | -X4 = 332 mm (13.1 in.) | |
| 10 in. and up | -X5 = 408 mm (16.1 in.) | |

8510-XX/8512-XX Integral Sensor

shown with Transmitter and Integral Adapter Kit (sold separately)

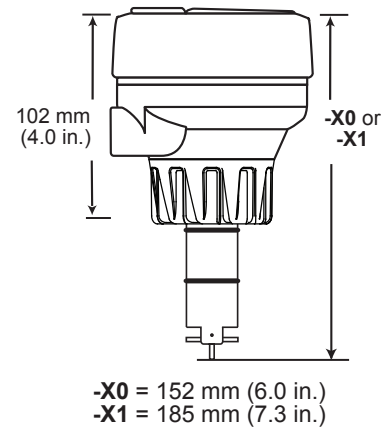

Specifications

General

Flow Rate Range:

| | |
|------|-------------------------------|
| 515 | 0.3 to 6 m/s (1 to 20 ft/s) |
| 2536 | 0.1 to 6 m/s (0.3 to 20 ft/s) |

Pipe Size Range

DN15 to DN900 (½ in. to 36 in.)

PVC.....DN15 to DN100 (½ in. to 4 in.)

Cable Length

7.6 m (25 ft) standard

515.....60 m (200 ft) maximum

2536.....305 m (1000 ft) maximum

Cable Type

2-conductor twisted pair w/ shield (22 AWG)

Minimum Reynolds Number..4500

Materials:

Cap Material.....Glass Filled Polypropylene

515: Red

2536: Blue

2536 (PVC): Gray

Wetted Materials:

Sensor Body.....Glass Filled Polypropylene

(black) PVDF, or (gray) PVC

O-Rings.....FKM (Std), EPR (EPDM) or

FFKM optional

Pin.....Titanium, Hastelloy-C or PVDF;

optional Ceramic,

Tantalum, or Stainless Steel

Rotor.....Black PVDF or Natural PVDF;

optional ETFE with or without

carbon fiber reinforced PTFE

sleeve for rotor pin

Shipping Weight:

-X0.....0.454 kg (1 lb)

-X1.....0.476 kg (1.04 lbs)

-X2.....0.680 kg (1.50 lbs)

-X3.....0.794 kg (1.75 lbs)

-X4.....0.850 kg (1.87 lbs)

-X5.....1.0 kg (2.20 lbs)

3519.....1.3 kg (2.86 lbs)

Performance

Linearity.....±1% of maximum range

@ 25 °C (77 °F)

Repeatability.....±0.5% maximum range

@ 25 °C (77 °F)

Electrical

515 Sensor

Frequency.....19.7 Hz per m/s nominal

(6 Hz per ft/s)

Amplitude.....3.3 V p/p per m/s nominal

(1V p/p per ft/s)

Source Impedance.....8 kΩ

2536 Sensor

Frequency.....49 Hz per m/s nominal

(15 Hz per ft/s nominal)

Supply Voltage.....5 to 24 VDC ±10% regulated

Supply Current.....<1.5 mA @ 3.3 to 6 VDC

<20 mA @ 6 to 24 VDC

Output Type.....Open collector, sinking

Output Current.....10 mA maximum

Specifications Continued

Environmental Requirements

Pressure/Temperature Ratings

Standard and Integral Sensors:

Polypropylene Body:

• **515:** 1.7 bar (25 psi) max @ 90 °C (194 °F)

12.5 bar (180 psi) max @ 20 °C (68 °F)

• **2536:** 1.7 bar (25 psi) max @ 85 °C (185 °F)

12.5 bar (180 psi) max @ 20 °C (68 °F)

Operating Temperature.....-18 °C to 66 °C (0 °F to 150 °F)

PVDF Body :

• **515:** 1.7 bar (25 psi) max @ 100°C (212 °F)

14 bar (200 psi) max @ 20 °C (68 °F)

• **2536:** 1.7 bar (25 psi) max @ 85 °C (185 °F)

14 bar (200 psi) max @ 20 °C (68 °F)

Operating Temperature.....-18 °C to 100 °C (0 °F to 212 °F)

PVC Body:

• **2536:** 6.9 bar (100 psi) max @ 60 °C (140 °F)

14 bar (200 psi) max @ 20 °C (68 °F)


Operating Temperature.....0 °C to 50 °C (32 °F to 122°F)

Polypropylene Wet-Tap Sensor Body:

• 7 bar (100 psi) @ 20 °C (68 °F) max

• Max Removal Rating.....1.7 bar @ 22 °C (25 psi @ 72 °F)

Operating Temperature.....-18 °C to 66 °C (0 °F to 150 °F)

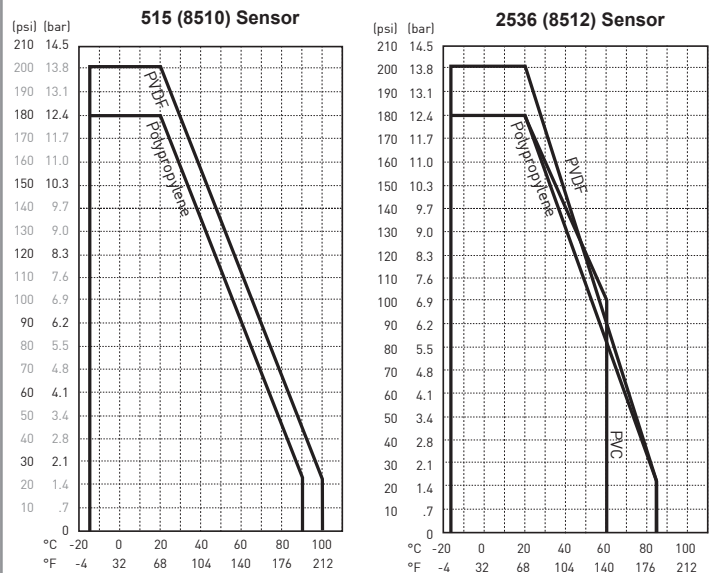

Standards and Approvals

- RoHS Compliant
- China RoHS (Go to www.gfsignet.com for details)
- Manufactured under ISO 9001 for Quality, ISO 14001 for Environmental Management and OHSAS 18001 for Occupational Health and Safety.

P51530

- NSF (P51530-PX versions only)
- Lloyd's Register Type Approval

2536

- NSF (3-2536-PX versions only)
- CE

FC Declaration of Conformity according to FCC Part 15


This device complies with Part 15 of the FCC rules.

Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

Location of Fitting

To ensure the fluid velocity profile is fully developed, without distortion from piping system components, please adhere to the recommended straight run geometry.

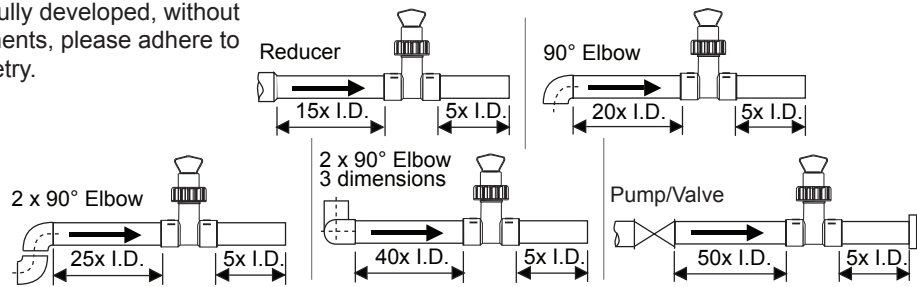

Sensor Mounting Position

Horizontal pipe Runs


To minimize adverse effects of air pockets, sediment, or excessive rotor wear (Paddlewheels), avoid mounting the flow sensor at the top of the pipe (0°), bottom of pipe (180°), or the sides (90° from vertical.)

Vertical Pipe Runs

Mount flow sensors in any direction. To ensure pipe is flowing full, with some back pressure, it's highly recommended the fluid flow is upward.

Gravity and Discharge Lines

It's recommended to install a trap to ensure pipe is full during flow conditions, and to minimize air pockets.

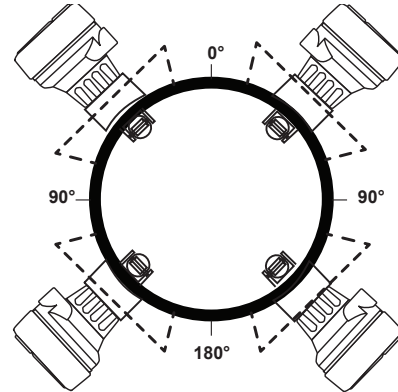

Standard Sensor Installation

- Lubricate O-rings with a non-petroleum based, viscous lubricant (grease) compatible with the system.
- Using an alternating/twisting motion, lower the sensor into the fitting, making sure the installation arrows on the black cap are pointing in the direction of flow, see Figure A.
- Engage one thread of the sensor cap then turn the sensor until the alignment tab is seated in the fitting notch.



Hand tighten the sensor cap.
DO NOT use any tools on the sensor cap or the cap threads and/or fitting flange threads will be damaged, see Figure B.

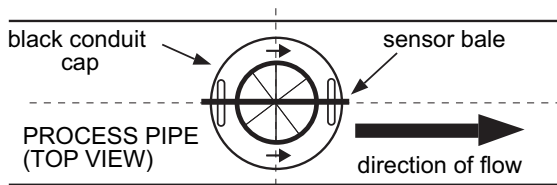


Figure A


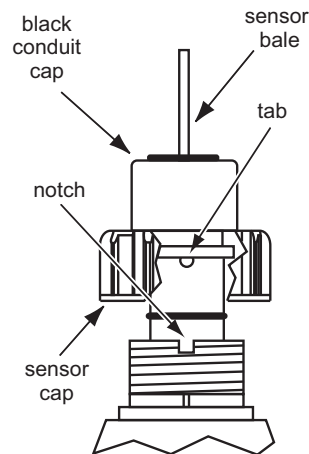


Figure B

Rotor Replacement Procedure

- To remove the rotor, insert a small screwdriver between the rotor and the ear of the sensor.
- Twist the screwdriver blade to flex the ear outward enough to remove one end of the rotor and pin.
- DO NOT flex the ear any more than necessary! If it breaks, the sensor cannot be repaired.
- Install the new rotor by inserting one tip of the pin into the hole, then flex the opposite ear back enough to slip rotor into place.




Sensor Wiring




Technical Notes

- Use 2-conductor shielded cable for cable extensions.
- Cable shield must be maintained through cable splice.
- Refer to your instrument manual for specific wiring details.

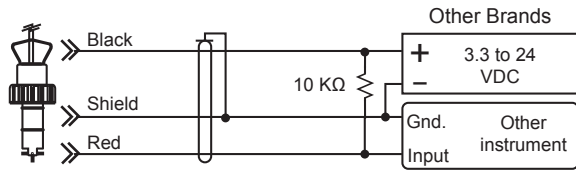


DC sensor power supplied from Signet instrument.



10 KΩ Pull-up resistor may be required for non-Signet brand instrument.

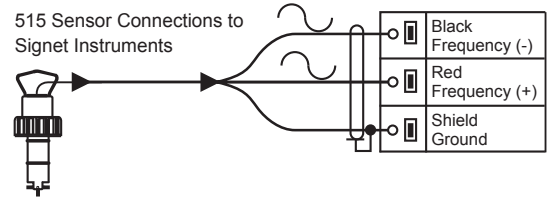

9900 Frequency




9950 Frequency

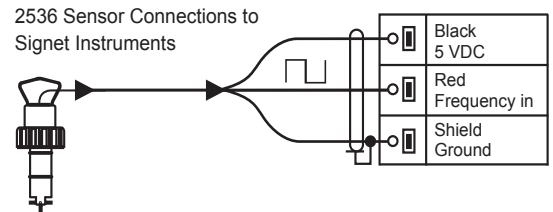

H-Dimensions

The plastic sensor insert in the Weldolet fitting MUST be removed during the welding process. When reinstalled, it is important that the insert be threaded to the proper height ("H" dimension).



| Weldolet part number | "H" dimension | |
|----------------------|---------------|--------|
| | mm | inches |
| CS4W020 | 60.45 | 2.38 |
| CS4W025 | 62.99 | 2.48 |
| CS4W030 | 62.73 | 2.47 |
| CS4W040 | 62.23 | 2.45 |
| CS4W050 | 82.29 | 3.24 |
| CS4W060 | 78.99 | 3.11 |
| CS4W080 | 73.15 | 2.88 |
| CS4W100 | 143.00 | 5.63 |
| CS4W120 | 137.16 | 5.25 |
| CS4W140 | 129.54 | 5.40 |
| CS4W160 | 123.19 | 4.85 |
| CS4W180 | 116.84 | 4.60 |
| CS4W200 | 111.25 | 4.38 |

| Weldolet part number | "H" dimension | |
|----------------------|---------------|--------|
| | mm | inches |
| CS4W240 | 105.66 | 4.16 |
| CS4W360 | 104.14 | 4.10 |
| CR4W020 | 60.45 | 2.38 |
| CR4W025 | 62.99 | 2.48 |
| CR4W030 | 62.73 | 2.47 |
| CR4W040 | 62.23 | 2.45 |
| CR4W050 | 82.29 | 3.24 |
| CR4W060 | 78.99 | 3.11 |
| CS4W080 | 73.15 | 2.88 |
| CR4W100 | 143.00 | 5.63 |
| CR4W120 | 137.16 | 5.40 |

A **K-Factor** is the number of pulses a sensor will generate for each engineering unit of fluid that passes the sensor. K-Factors for water are listed below in U.S. gallons and liters. For example, in a 1-inch PVC pipe, the 515 paddlewheel generates 172.07 pulses per gallon of water passing the rotor. K-Factors are listed for pipes up to 12 inches. For pipes over 12 inches, consult your Signet distributor.

515 / 8510-XX

| Pipe Size (in.) | Fitting | Liters | U.S. Gallons |
|---|-----------|--------|--------------|
| SCH 80 PVC Tees for SCH 80 PVC Pipe | | | |
| 1/2 | MPV8T005 | 137.42 | 520.12 |
| 3/4 | MPV8T007 | 78.61 | 297.52 |
| 1 | MPV8T010 | 45.46 | 172.07 |
| 1-1/4 | MPV8T012 | 24.19 | 91.54 |
| 1-1/2 | MPV8T015 | 16.44 | 62.22 |
| 2 | MPV8T020 | 9.60 | 36.32 |
| SCH 80 PVC Tees for SCH 80 PVC Pipe | | | |
| 2-1/2 | PV8T025 | 5.7683 | 21.833 |
| 3 | PV8T030 | 3.5775 | 13.541 |
| 4 | PV8T040 | 2.0147 | 7.6258 |
| SCH 80 CPVC Tees for SCH 80 CPVC Pipe | | | |
| 1/2 | MCPV8T005 | 137.42 | 520.12 |
| 3/4 | MCPV8T007 | 78.61 | 297.52 |
| 1 | MCPV8T010 | 45.46 | 172.07 |
| 1-1/4 | MCPV8T012 | 24.19 | 91.54 |
| 1-1/2 | MCPV8T015 | 16.44 | 62.22 |
| 2 | MCPV8T020 | 9.60 | 36.32 |
| SCH 80 PVC Saddles for SCH 80 PVC Pipe | | | |
| 2 | PV8S020 | 8.5812 | 32.480 |
| 2-1/2 | PV8S025 | 5.7683 | 21.833 |
| 3 | PV8S030 | 3.5775 | 13.541 |
| 4 | PV8S040 | 2.0147 | 7.6258 |
| 6 | PV8S060 | 1.0997 | 4.1623 |
| 8 | PV8S080 | 0.6263 | 2.3705 |
| 10 | PV8S100 | 0.4042 | 1.5300 |
| 12 | PV8S120 | 0.2801 | 1.0600 |
| SCH 80 PVC Saddle for SCH 40 PVC Pipe | | | |
| 2 | PV8S020 | 7.2259 | 27.350 |
| 2-1/2 | PV8S025 | 4.9866 | 18.874 |
| 3 | PV8S030 | 3.3389 | 12.638 |
| 4 | PV8S040 | 1.7776 | 6.7282 |
| 6 | PV8S060 | 0.9854 | 3.7297 |
| 8 | PV8S080 | 0.5688 | 2.1527 |
| 10 | PV8S100 | 0.3567 | 1.3500 |
| 12 | PV8S120 | 0.2536 | 0.9600 |

515 / 8510-XX

| Pipe Size (in.) | Fitting | Liters | U.S. Gallons |
|--|---------|--------|--------------|
| Carbon Steel Tees for SCH 40 Pipe | | | |
| 1/2 | CS4T005 | 97.808 | 370.20 |
| 3/4 | CS4T007 | 56.027 | 212.06 |
| 1 | CS4T010 | 37.289 | 141.14 |
| 1-1/4 | CS4T012 | 16.025 | 60.655 |
| 1-1/2 | CS4T015 | 11.982 | 45.350 |
| 2 | CS4T020 | 7.0717 | 26.767 |
| Stainless Steel Tees for SCH 40 Pipe | | | |
| 1/2 | CR4T005 | 94.838 | 358.96 |
| 3/4 | CR4T007 | 53.530 | 202.61 |
| 1 | CR4T010 | 33.590 | 127.14 |
| 1-1/4 | CR4T012 | 16.357 | 61.910 |
| 1-1/2 | CR4T015 | 10.676 | 40.410 |
| 2 | CR4T020 | 5.8917 | 22.300 |
| Galvanized Iron Tees for SCH 40 Pipe | | | |
| 1 | IR4T010 | 27.619 | 104.54 |
| 1-1/4 | IR4T012 | 16.639 | 62.979 |
| 1 1/2 | IR4T015 | 12.335 | 46.688 |
| 2 | IR4T020 | 7.7832 | 29.459 |
| Bronze Tees for SCH 40 Pipe | | | |
| 1 | BR4T010 | 27.619 | 104.54 |
| 1-1/4 | BR4T012 | 16.639 | 62.979 |
| 1-1/2 | BR4T015 | 12.335 | 46.688 |
| 2 | BR4T020 | 7.7832 | 29.459 |
| Copper Tee Fittings for Copper Pipe SCH K | | | |
| 1/2 | CUKT005 | 117.10 | 443.21 |
| 3/4 | CUKT007 | 56.052 | 212.16 |
| 1 | CUKT010 | 33.600 | 127.18 |
| 1-1/4 | CUKT012 | 23.307 | 88.218 |
| 1-1/2 | CUKT015 | 15.049 | 56.962 |
| 2 | CUKT020 | 7.7595 | 29.370 |
| Copper Tee Fittings for Copper Pipe SCH L | | | |
| 1/2 | CUKT005 | 109.49 | 414.41 |
| 3/4 | CUKT007 | 50.485 | 191.09 |
| 1 | CUKT010 | 31.662 | 119.84 |
| 1-1/4 | CUKT012 | 22.576 | 85.451 |
| 1-1/2 | CUKT015 | 14.573 | 55.160 |
| 2 | CUKT020 | 7.5575 | 28.605 |

515 / 8510-XX

| Pipe Size (in.) | Fitting | Liters | U.S. Gallons |
|--|---------|--------|--------------|
| Stainless Steel Weldolets for SCH 40 Pipe | | | |
| 2-1/2 | CR4W025 | 4.9670 | 18.800 |
| 3 | CR4W030 | 3.2153 | 12.170 |
| 4 | CR4W040 | 1.8388 | 6.9600 |
| 5 | CR4W050 | 1.3897 | 5.2600 |
| 6 | CR4W060 | 0.9749 | 3.6900 |
| 8 | CR4W080 | 0.5627 | 2.1300 |
| 10 | CR4W100 | 0.3567 | 1.3500 |
| 12 | CR4W120 | 0.2536 | 0.9600 |
| Carbon Steel Weldolets for SCH 40 Pipe | | | |
| 2-1/2 | CS4W025 | 4.9670 | 18.800 |
| 3 | CS4W030 | 3.2153 | 12.170 |
| 4 | CS4W040 | 1.8388 | 6.9600 |
| 5 | CS4W050 | 1.3897 | 5.2600 |
| 6 | CS4W060 | 0.9749 | 3.6900 |
| 8 | CS4W080 | 0.5627 | 2.1300 |
| 10 | CS4W100 | 0.3567 | 1.3500 |
| 12 | CS4W120 | 0.2536 | 0.9600 |
| Copper/Bronze Brazolets for SCH 40 Pipe | | | |
| 2-1/2 | BR4B025 | 4.9670 | 18.800 |
| 3 | BR4B030 | 3.2153 | 12.170 |
| 4 | BR4B040 | 1.8388 | 6.9600 |
| 5 | BR4B050 | 1.3897 | 5.2600 |
| 6 | BR4B060 | 0.9749 | 3.6900 |
| 8 | BR4B080 | 0.5627 | 2.1300 |
| 10 | BR4B100 | 0.3567 | 1.3500 |
| 12 | BR4B120 | 0.2536 | 0.9600 |

515 / 8510-XX

| Pipe Size (in.) | Fitting | Liters | U.S. Gallons |
|--|---------|--------|--------------|
| SCH 80 Iron Saddles for SCH 80 Pipe | | | |
| 2 | IR8S020 | 8.5495 | 32.360 |
| 2-1/2 | IR8S025 | 5.8705 | 22.220 |
| 3 | IR8S030 | 3.5456 | 13.420 |
| 4 | IR8S040 | 2.0238 | 7.6600 |
| 5 | IR8S050 | 1.5482 | 5.8600 |
| 6 | IR8S060 | 1.0806 | 4.0900 |
| 8 | IR8S080 | 0.6156 | 2.3300 |
| 10 | IR8S100 | 0.4042 | 1.5300 |
| 12 | IR8S120 | 0.2801 | 1.0600 |
| SCH 80 Iron Saddle for SCH 40 Pipe | | | |
| 2 | IR8S020 | 7.0859 | 26.820 |
| 2-1/2 | IR8S025 | 4.9670 | 18.800 |
| 3 | IR8S030 | 3.1678 | 11.990 |
| 4 | IR8S040 | 1.8098 | 6.8500 |
| 5 | IR8S050 | 1.4082 | 5.3300 |
| 6 | IR8S060 | 0.9934 | 3.7600 |
| 8 | IR8S080 | 0.5627 | 2.1300 |
| 10 | IR8S100 | 0.3567 | 1.3500 |
| 12 | IR8S120 | 0.2536 | 0.9600 |

K-Factors DIN Pipes

515 / 8510-XX

| Pipe Size | Fitting | Liters | U.S. Gallons |
|---|---------|--------|--------------|
| Polypropylene Fittings (DIN/ISO and BS and ANSI) | | | |
| DN 15 | PPMT005 | 127.23 | 481.55 |
| DN 20 | PPMT007 | 73.207 | 277.09 |
| DN 25 | PPMT010 | 37.300 | 141.18 |
| DN 32 | PPMT012 | 22.071 | 83.540 |
| DN 40 | PPMT015 | 13.544 | 51.265 |
| DN 50 | PPMT020 | 7.8193 | 29.596 |
| PVDF Fittings (DIN/ISO and BS and ANSI) | | | |
| DN 15 | SFMT005 | 111.19 | 420.87 |
| DN 20 | SFMT007 | 60.277 | 228.15 |
| DN 25 | SFMT010 | 36.116 | 136.70 |
| DN 32 | SFMT012 | 20.950 | 79.294 |
| DN 40 | SFMT015 | 11.490 | 43.490 |
| DN 50 | SFMT020 | 6.8450 | 25.908 |
| PVC Fittings (DIN/ISO) - Europe only | | | |
| DN 15 | PVMT005 | 128.45 | 486.18 |
| DN 20 | PVMT007 | 64.160 | 242.85 |
| DN 25 | PVMT010 | 39.270 | 148.64 |
| DN 32 | PVMT012 | 22.490 | 85.125 |
| DN 40 | PVMT015 | 13.700 | 51.855 |
| DN 50 | PVMT020 | 7.8600 | 29.750 |

2536 / 8512-XX

| Pipe Size (in.) | Fitting | Liters | U.S.Gallons |
|--|----------|--------|-------------|
| SCH 80 PVC Tees for SCH 80 PVC Pipe | | | |
| 1/2 | MPV8T005 | 271.37 | 1027.1 |
| 3/4 | MPV8T007 | 154.08 | 583.19 |
| 1 | MPV8T010 | 88.65 | 335.53 |
| 1-1/4 | MPV8T012 | 47.24 | 178.79 |
| 1-1/2 | MPV8T015 | 32.08 | 121.42 |
| 2 | MPV8T020 | 18.87 | 71.44 |

SCH 80 PVC Tees for SCH 80 PVC Pipe

| | | | |
|-------|---------|--------|--------|
| 2-1/2 | PV8T025 | 11.359 | 42.994 |
| 3 | PV8T030 | 7.0414 | 26.652 |
| 4 | PV8T040 | 3.9645 | 15.006 |

SCH 80 CPVC Tees for SCH 80 CPVC Pipe

| | | | |
|-------|-----------|--------|--------|
| 1/2 | MCPV8T005 | 271.37 | 1027.1 |
| 3/4 | MCPV8T007 | 154.08 | 583.19 |
| 1 | MCPV8T010 | 88.65 | 335.53 |
| 1-1/4 | MCPV8T012 | 47.24 | 178.79 |
| 1-1/2 | MCPV8T015 | 32.08 | 121.42 |
| 2 | MCPV8T020 | 18.87 | 71.44 |

SCH 80 PVC Saddles for SCH 80 PVC Pipe

| | | | |
|-------|---------|--------|--------|
| 2 | PV8S020 | 17.633 | 66.739 |
| 2-1/2 | PV8S025 | 11.359 | 42.994 |
| 3 | PV8S030 | 7.0414 | 26.652 |
| 4 | PV8S040 | 3.9645 | 15.006 |
| 6 | PV8S060 | 2.1994 | 8.3246 |
| 8 | PV8S080 | 1.3253 | 5.0164 |
| 10 | PV8S100 | 0.808 | 3.0600 |
| 12 | PV8S120 | 0.571 | 2.1600 |

SCH 80 PVC Saddle for SCH 40 PVC Pipe

| | | | |
|-------|---------|--------|--------|
| 2 | PV8S020 | 14.452 | 54.700 |
| 2-1/2 | PV8S025 | 9.8175 | 37.159 |
| 3 | PV8S030 | 6.2608 | 23.697 |
| 4 | PV8S040 | 3.5552 | 13.456 |
| 6 | PV8S060 | 1.9708 | 7.4594 |
| 8 | PV8S080 | 1.1966 | 4.5292 |
| 10 | PV8S100 | 0.740 | 2.8000 |
| 12 | PV8S120 | 0.523 | 1.9800 |

2536 / 8512-XX

| Pipe Size (in.) | Fitting | Liters | U.S.Gallons |
|--|---------|--------|-------------|
| Carbon Steel Tees for SCH 40 Pipe | | | |
| 1/2 | CS4T005 | 199.74 | 756.00 |
| 3/4 | CS4T007 | 115.90 | 438.69 |
| 1 | CS4T010 | 75.768 | 286.78 |
| 1-1/4 | CS4T012 | 32.026 | 121.22 |
| 1-1/2 | CS4T015 | 24.079 | 91.139 |
| 2 | CS4T020 | 14.391 | 54.468 |

Stainless Steel Tees for SCH 40 Pipe

| | | | |
|-------|---------|--------|--------|
| 1/2 | CR4T005 | 193.98 | 734.20 |
| 3/4 | CR4T007 | 108.88 | 412.10 |
| 1 | CR4T010 | 66.764 | 252.70 |
| 1-1/4 | CR4T012 | 33.849 | 128.12 |
| 1-1/2 | CR4T015 | 20.428 | 77.320 |
| 2 | CR4T020 | 12.095 | 45.780 |

Galvanized Iron Tees for SCH 40 Pipe

| | | | |
|-------|---------|--------|--------|
| 1 | IR4T010 | 56.277 | 213.01 |
| 1-1/4 | IR4T012 | 33.751 | 127.75 |
| 1 1/2 | IR4T015 | 24.941 | 94.401 |
| 2 | IR4T020 | 15.699 | 59.420 |

Bronze Tees for SCH 40 Pipe

| | | | |
|-------|---------|--------|--------|
| 1 | BR4T010 | 56.277 | 213.01 |
| 1-1/4 | BR4T012 | 33.751 | 127.75 |
| 1-1/2 | BR4T015 | 24.941 | 94.401 |
| 2 | BR4T020 | 15.699 | 59.420 |

Copper Tee Fittings for Copper Pipe SCH K

| | | | |
|-------|---------|--------|--------|
| 1/2 | CUKT005 | 242.50 | 917.84 |
| 3/4 | CUKT007 | 113.15 | 428.27 |
| 1 | CUKT010 | 67.749 | 256.43 |
| 1-1/4 | CUKT012 | 46.615 | 176.44 |
| 1-1/2 | CUKT015 | 30.565 | 115.69 |
| 2 | CUKT020 | 16.746 | 63.385 |

Copper Tee Fittings for Copper Pipe SCH L

| | | | |
|-------|---------|--------|--------|
| 1/2 | CUKT005 | 226.74 | 858.22 |
| 3/4 | CUKT007 | 101.91 | 385.74 |
| 1 | CUKT010 | 63.841 | 241.64 |
| 1-1/4 | CUKT012 | 45.152 | 170.90 |
| 1-1/2 | CUKT015 | 29.598 | 112.03 |
| 2 | CUKT020 | 16.310 | 61.74 |

2536 / 8512-XX

| Pipe Size (in.) | Fitting | Liters | U.S.Gallons |
|--|---------|--------|-------------|
| Stainless Steel Weldolets for SCH 40 Pipe | | | |
| 2-1/2 | CR4W025 | 9.9339 | 37.600 |
| 3 | CR4W030 | 6.4306 | 24.340 |
| 4 | CR4W040 | 3.6777 | 13.920 |
| 5 | CR4W050 | 2.8692 | 10.860 |
| 6 | CR4W060 | 1.9868 | 7.5200 |
| 8 | CR4W080 | 1.1466 | 4.3400 |
| 10 | CR4W100 | 0.7292 | 2.7600 |
| 12 | CR4W120 | 0.5125 | 1.9400 |
| Carbon Steel Weldolets for SCH 40 Pipe | | | |
| 2-1/2 | CS4W025 | 9.9339 | 37.600 |
| 3 | CS4W030 | 6.4306 | 24.340 |
| 4 | CS4W040 | 3.6777 | 13.920 |
| 5 | CS4W050 | 2.8692 | 10.860 |
| 6 | CS4W060 | 1.9868 | 7.5200 |
| 8 | CS4W080 | 1.1466 | 4.3400 |
| 10 | CS4W100 | 0.7292 | 2.7600 |
| 12 | CS4W120 | 0.5125 | 1.9400 |
| Copper/Bronze Brazolets for SCH 40 Pipe | | | |
| 2-1/2 | BR4B025 | 9.934 | 37.600 |
| 3 | BR4B030 | 6.431 | 24.340 |
| 4 | BR4B040 | 3.678 | 13.920 |
| 5 | BR4B050 | 2.869 | 10.860 |
| 6 | BR4B060 | 1.987 | 7.5200 |
| 8 | BR4B080 | 1.147 | 4.3400 |
| 10 | BR4B100 | 0.729 | 2.7600 |
| 12 | BR4B120 | 0.513 | 1.9400 |

2536 / 8512-XX









| Pipe Size (in.) | Fitting | Liters | U.S.Gallons |
|--|---------|--------|-------------|
| SCH 80 Iron Saddles for SCH 80 Pipe | | | |
| 2 | IR8S020 | 17.099 | 64.720 |
| 2-1/2 | IR8S025 | 11.223 | 42.480 |
| 3 | IR8S030 | 6.980 | 26.420 |
| 4 | IR8S040 | 3.884 | 14.700 |
| 5 | IR8S050 | 3.218 | 12.180 |
| 6 | IR8S060 | 2.230 | 8.4400 |
| 8 | IR8S080 | 1.295 | 4.9000 |
| 10 | IR8S100 | 0.808 | 3.0600 |
| 12 | IR8S120 | 0.571 | 2.1600 |
| SCH 80 Iron Saddle for SCH 40 Pipe | | | |
| 2 | IR8S020 | 14.172 | 53.640 |
| 2-1/2 | IR8S025 | 9.934 | 37.600 |
| 3 | IR8S030 | 6.135 | 23.220 |
| 4 | IR8S040 | 3.503 | 13.260 |
| 5 | IR8S050 | 2.917 | 11.040 |
| 6 | IR8S060 | 1.913 | 7.2400 |
| 8 | IR8S080 | 1.162 | 4.4000 |
| 10 | IR8S100 | 0.740 | 2.8000 |
| 12 | IR8S120 | 0.523 | 1.9800 |

K-Factors DIN Pipes

2536 / 8512-XX

| Pipe Size | Fitting | Liters | U.S. Gallons |
|---|---------|--------|--------------|
| Polypropylene Fittings (DIN/ISO and BS and ANSI) | | | |
| DN 15 | PPMT005 | 251.75 | 952.87 |
| DN 20 | PPMT007 | 148.77 | 563.10 |
| DN 25 | PPMT010 | 77.042 | 291.60 |
| DN 32 | PPMT012 | 44.709 | 169.22 |
| DN 40 | PPMT015 | 27.450 | 103.90 |
| DN 50 | PPMT020 | 16.060 | 60.789 |
| PVDF Fittings (DIN/ISO and BS and ANSI) | | | |
| DN 15 | SFMT005 | 218.56 | 827.26 |
| DN 20 | SFMT007 | 129.42 | 489.87 |
| DN 25 | SFMT010 | 74.915 | 283.55 |
| DN 32 | SFMT012 | 41.899 | 158.59 |
| DN 40 | SFMT015 | 22.980 | 86.980 |
| DN 50 | SFMT020 | 13.312 | 50.385 |
| PVC Fittings (DIN/ISO) - Europe only | | | |
| DN 15 | PVMT005 | 256.90 | 972.37 |
| DN 20 | PVMT007 | 128.32 | 485.69 |
| DN 25 | PVMT010 | 78.540 | 297.274 |
| DN 32 | PVMT012 | 44.980 | 170.249 |
| DN 40 | PVMT015 | 27.400 | 103.709 |
| DN 50 | PVMT020 | 15.720 | 59.500 |

Signet Fittings

| Type | Description | Type | Description |
|--|---|--|---|
|  <p>Plastic Tees</p> | <ul style="list-style-type: none"> • 0.5 to 2 inch versions • MPVC or CPVC |  <p>Iron, Carbon Steel, 316 SS Threaded Tees</p> | <ul style="list-style-type: none"> • 0.5 to 2 inch versions • Mounts on threaded pipe ends |
|  <p>PVC Glue-on Saddles</p> | <ul style="list-style-type: none"> • Available in 10 and 12 inch sizes only • Cut 2-1/2 inch hole in pipe • Weld in place using solvent cement |  <p>Carbon Steel & Stainless Steel Weld-on Weldolets</p> | <ul style="list-style-type: none"> • 2 to 4 inch, cut 1-7/16 inch hole • Over 4 inch, cut 2-1/8 inch hole in pipe |
|  <p>PVC Clamp-on Saddles</p> | <ul style="list-style-type: none"> • 2 to 4 inch, cut 1-7/16 inch hole in pipe • 6 to 8 inch, cut 2-1/8 inch hole in pipe |  <p>Fiberglass Tees FPT</p> | <ul style="list-style-type: none"> • 1.5 inch to 2 inch PVDF insert |
|  <p>Iron Strap-on Saddles</p> | <ul style="list-style-type: none"> • 2 to 4 inch, cut 1-7/16 inch hole in pipe • Over 4 inch, cut 2-1/8 inch hole in pipe • Special order 14 inch to 36 inch |  <p>Metric Union Fitting</p> | <ul style="list-style-type: none"> • For pipes from DN 15 to 50 mm • PP or PVDF |

Ordering Information

515/8510-XX

| Mfr. Part No. | Code | Description |
|---------------|-------------|---|
| P51530-H0 | 198 801 659 | Sensor, Polypropylene, Hastelloy-C, Black PVDF, 0.5 to 4 inch |
| P51530-P0 | 198 801 620 | Sensor, Polypropylene, Titanium Rotor Pin, PVDF Rotor (black), 0.5 to 4 inch |
| P51530-P1 | 198 801 621 | Sensor, Polypropylene, Titanium Rotor Pin, PVDF Rotor (black), 5 to 8 inch |
| P51530-P2 | 198 801 622 | Sensor, Polypropylene, Titanium Rotor Pin, PVDF Rotor (black), 10 to 36 inch |
| P51530-P3 | 198 840 310 | Sensor, Wet-Tap, Polypropylene, Titanium Rotor Pin, PVDF Rotor (black), 0.5 to 4 inch |
| P51530-P4 | 198 840 311 | Sensor, Wet-Tap, Polypropylene, Titanium Rotor Pin, PVDF Rotor (black), 5 to 8 inch |
| P51530-P5 | 198 840 312 | Sensor, Wet-Tap, Polypropylene, Titanium Rotor Pin, PVDF Rotor (black), 10 to 36 inch |
| P51530-S0 | 198 801 661 | Sensor, Polypropylene, PVDF (natural), Black PVDF; 0.5 to 4 inch |
| P51530-T0 | 198 801 663 | Sensor, PVDF (natural), PVDF (natural) Rotor Pin, PVDF Rotor (natural), 0.5 to 4 inch |
| P51530-T1 | 198 801 664 | Sensor, PVDF (natural), PVDF (natural) Rotor Pin, PVDF Rotor (natural), 5 to 8 inch |
| P51530-V0 | 198 801 623 | Sensor, PVDF (natural), Hastelloy-C Rotor Pin, PVDF Rotor (natural), 0.5 to 4 inch |
| P51530-V1 | 198 801 624 | Sensor, PVDF (natural), Hastelloy-C Rotor Pin, PVDF Rotor (natural), 5 to 8 inch |
| P51530-V2 | 198 801 625 | Sensor, PVDF (natural), Hastelloy-C Rotor Pin, PVDF Rotor (natural), 10 to 36 inch |
| 3-8510-P0 | 198 864 504 | Sensor, Integral, PP, Titanium Rotor Pin, PVDF Rotor (black), 0.5 to 4 inch |
| 3-8510-P1 | 198 864 505 | Sensor, Integral, PP, Titanium Rotor Pin, PVDF Rotor (black), 5 to 8 inch |
| 3-8510-T0 | 159 000 622 | Sensor, Integral, PVDF (natural), PVDF (natural) Rotor Pin, PVDF Rotor (natural), 0.5 to 4 inch |
| 3-8510-V0 | 198 864 506 | Sensor, Integral, PVDF (natural), Hastelloy-C Rotor Pin, PVDF Rotor (natural), 0.5 to 4 inch |
| 3-3519/515-P3 | 159 000 819 | Sensor & Wet-Tap Assy., PP, Titanium Rotor Pin, PVDF Rotor (black), 0.5 to 4 inch |
| 3-3519/515-P4 | 159 000 820 | Sensor & Wet-Tap Assy., PP, Titanium Rotor Pin, PVDF Rotor (black), 5 to 8 inch |
| 3-3519/515-P5 | 159 000 821 | Sensor & Wet-Tap Assy., PP, Titanium Rotor Pin, PVDF Rotor (black), 10 to 36 inch |

Replacement Parts 515/8510

| | | |
|--------------|-------------|------------------------------------|
| M1538-2 | 198 801 181 | Rotor, PVDF Black |
| P51547-3 | 159 000 474 | Rotor, PVDF Natural |
| M1538-4 | 198 820 018 | Rotor, ETFE |
| P51550-3 | 198 820 043 | Rotor and Pin, PVDF Natural |
| 3-0515.322-1 | 198 820 059 | Sleeved Rotor, PVDF Black |
| 3-0515.322-2 | 198 820 060 | Sleeved Rotor, PVDF Natural |
| 3-0515.322-3 | 198 820 017 | Sleeved Rotor, ETFE |
| P31542 | 198 801 630 | Sensor Cap, Red (for use with 515) |

Ordering Information

2536/8512-XX

| Mfr. Part No. | Code | Description |
|----------------|-------------|---|
| 3-2536-P0 | 198 840 143 | Sensor, Polypropylene, Titanium Rotor Pin, PVDF Rotor (black), ½ to 4 inch |
| 3-2536-P1 | 198 840 144 | Sensor, Polypropylene, Titanium Rotor Pin, PVDF Rotor (black), 5 to 8 inch |
| 3-2536-P2 | 198 840 145 | Sensor, Polypropylene, Titanium Rotor Pin, PVDF Rotor (black), 10 to 36 inch |
| 3-2536-P3 | 159 000 758 | Sensor, Wet-Tap, Polypropylene, Titanium Rotor Pin, PVDF Rotor (black), ½ to 4 inch |
| 3-2536-P4 | 159 000 759 | Sensor, Wet-Tap, Polypropylene, Titanium Rotor Pin, PVDF Rotor (black), 5 to 8 inch |
| 3-2536-P5 | 159 000 760 | Sensor, Wet-Tap, Polypropylene, Titanium Rotor Pin, PVDF Rotor (black), 10 to 36 inch |
| 3-2536-V0 | 198 840 146 | Sensor, PVDF (natural), Hastelloy-C Rotor Pin, PVDF Rotor (natural), ½ to 4 inch |
| 3-2536-V1 | 198 840 147 | Sensor, PVDF (natural), Hastelloy-C Rotor Pin, PVDF Rotor (natural), 5 to 8 inch |
| 3-2536-T0 | 198 840 149 | Sensor, PVDF (natural), PVDF (nat.) Rotor Pin, PVDF Rotor (natural), ½ to 4 inch |
| 3-2536-U0 | 159 001 843 | Sensor, PVC, Titanium Rotor Pin, ETFE Rotor, ½ to 4 inch |
| 3-8512-P0 | 198 864 513 | Sensor, Integral, PP, Titanium Rotor Pin, PVDF Rotor (black), ½ to 4 inch |
| 3-8512-P1 | 198 864 514 | Sensor, Integral, PP, Titanium Rotor Pin, PVDF Rotor (black), 5 to 8 inch |
| 3-8512-T0 | 198 864 518 | Sensor, Integral, PVDF (natural), PVDF (natural) Rotor Pin, PVDF Rotor (natural), ½ to 4 inch |
| 3-8512-V0 | 198 864 516 | Sensor, Integral, PVDF (natural), Hastelloy-C Rotor Pin, PVDF Rotor (natural), ½ to 4 inch |
| 3-3519/2536-P3 | 159 000 822 | Sensor & Wet-Tap Assy., PP, Titanium Rotor Pin, PVDF Rotor (black), ½ to 4 inch |
| 3-3519/2536-P4 | 159 000 823 | Sensor & Wet-Tap Assy., PP, Titanium Rotor Pin, PVDF Rotor (black), 5 to 8 inch |
| 3-3519/2536-P5 | 159 000 824 | Sensor & Wet-Tap Assy., PP, Titanium Rotor Pin, PVDF Rotor (black), 10 to 36 inch |

Replacement Parts 2536/8512

| | | |
|--------------|-------------|--------------------------------------|
| 3-2536.320-1 | 198 820 052 | Rotor, PVDF Black |
| 3-2536.320-2 | 159 000 272 | Rotor, PVDF Natural |
| 3-2536.320-3 | 159 000 273 | Rotor, ETFE |
| 3-2536.321 | 198 820 054 | Rotor and Pin, PVDF Natural |
| 3-2536.322-1 | 198 820 056 | Sleeved Rotor, PVDF Black |
| 3-2536.322-2 | 198 820 057 | Sleeved Rotor, PVDF Natural |
| 3-2536.322-3 | 198 820 058 | Sleeved Rotor, ETFE |
| P31542-3 | 159 000 464 | Sensor Cap, Blue (for use with 2536) |
| 3-2536.555 | 159 500 532 | Sensor Cap, Gray (for use with 2536) |

Accessories 515/8510 & 2536/8512

| | | |
|--------------|-------------|---|
| M1546-1 | 198 801 182 | Rotor Pin, Titanium |
| M1546-2 | 198 801 183 | Rotor Pin, Hastelloy-C |
| M1546-3 | 198 820 014 | Rotor Pin, Tantalum |
| M1546-4 | 198 820 015 | Rotor Pin, Stainless Steel |
| P51545 | 198 820 016 | Rotor Pin, Ceramic |
| 1220-0021 | 198 801 000 | O-Ring, FKM |
| 1224-0021 | 198 820 006 | O-Ring, EPDM |
| 1228-0021 | 198 820 007 | O-Ring, FFKM |
| P31536 | 198 840 201 | Sensor Plug, Polypropylene |
| P31934 | 159 000 466 | Conduit Cap |
| P51589 | 159 000 476 | Conduit Adapter Kit |
| 5523-0222 | 159 000 392 | Cable (per foot), 2 conductor with shield, 22 AWG |
| 3-8050 | 159 000 184 | Universal mount kit |
| 3-8050-1 | 159 000 753 | Universal junction box |
| 3-8050.390-1 | 159 001 702 | Retaining Nut Replacement Kit, NPT, Valox® |
| 3-8050.390-3 | 159 310 116 | Retaining Nut Replacement Kit, NPT, PP |
| 3-8050.390-4 | 159 310 117 | Retaining Nut Replacement Kit, NPT, PVDF |
| 3-8051 | 159 000 187 | Transmitter integral adapter (for 8510 and 8512) |



Georg Fischer Signet LLC, 3401 Aero Jet Avenue, El Monte, CA 91731-2882 U.S.A. • Tel. (626) 571-2770 • Fax (626) 573-2057
For Worldwide Sales and Service, visit our website: www.gfsignet.com • Or call (in the U.S.): (800) 854-4090
For the most up-to-date information, please refer to our website at www.gfsignet.com