




Targeted ►  
technology  
and know-how

The new  
butterfly valves  
type 567 and 568

# ➤ A winner in every detail

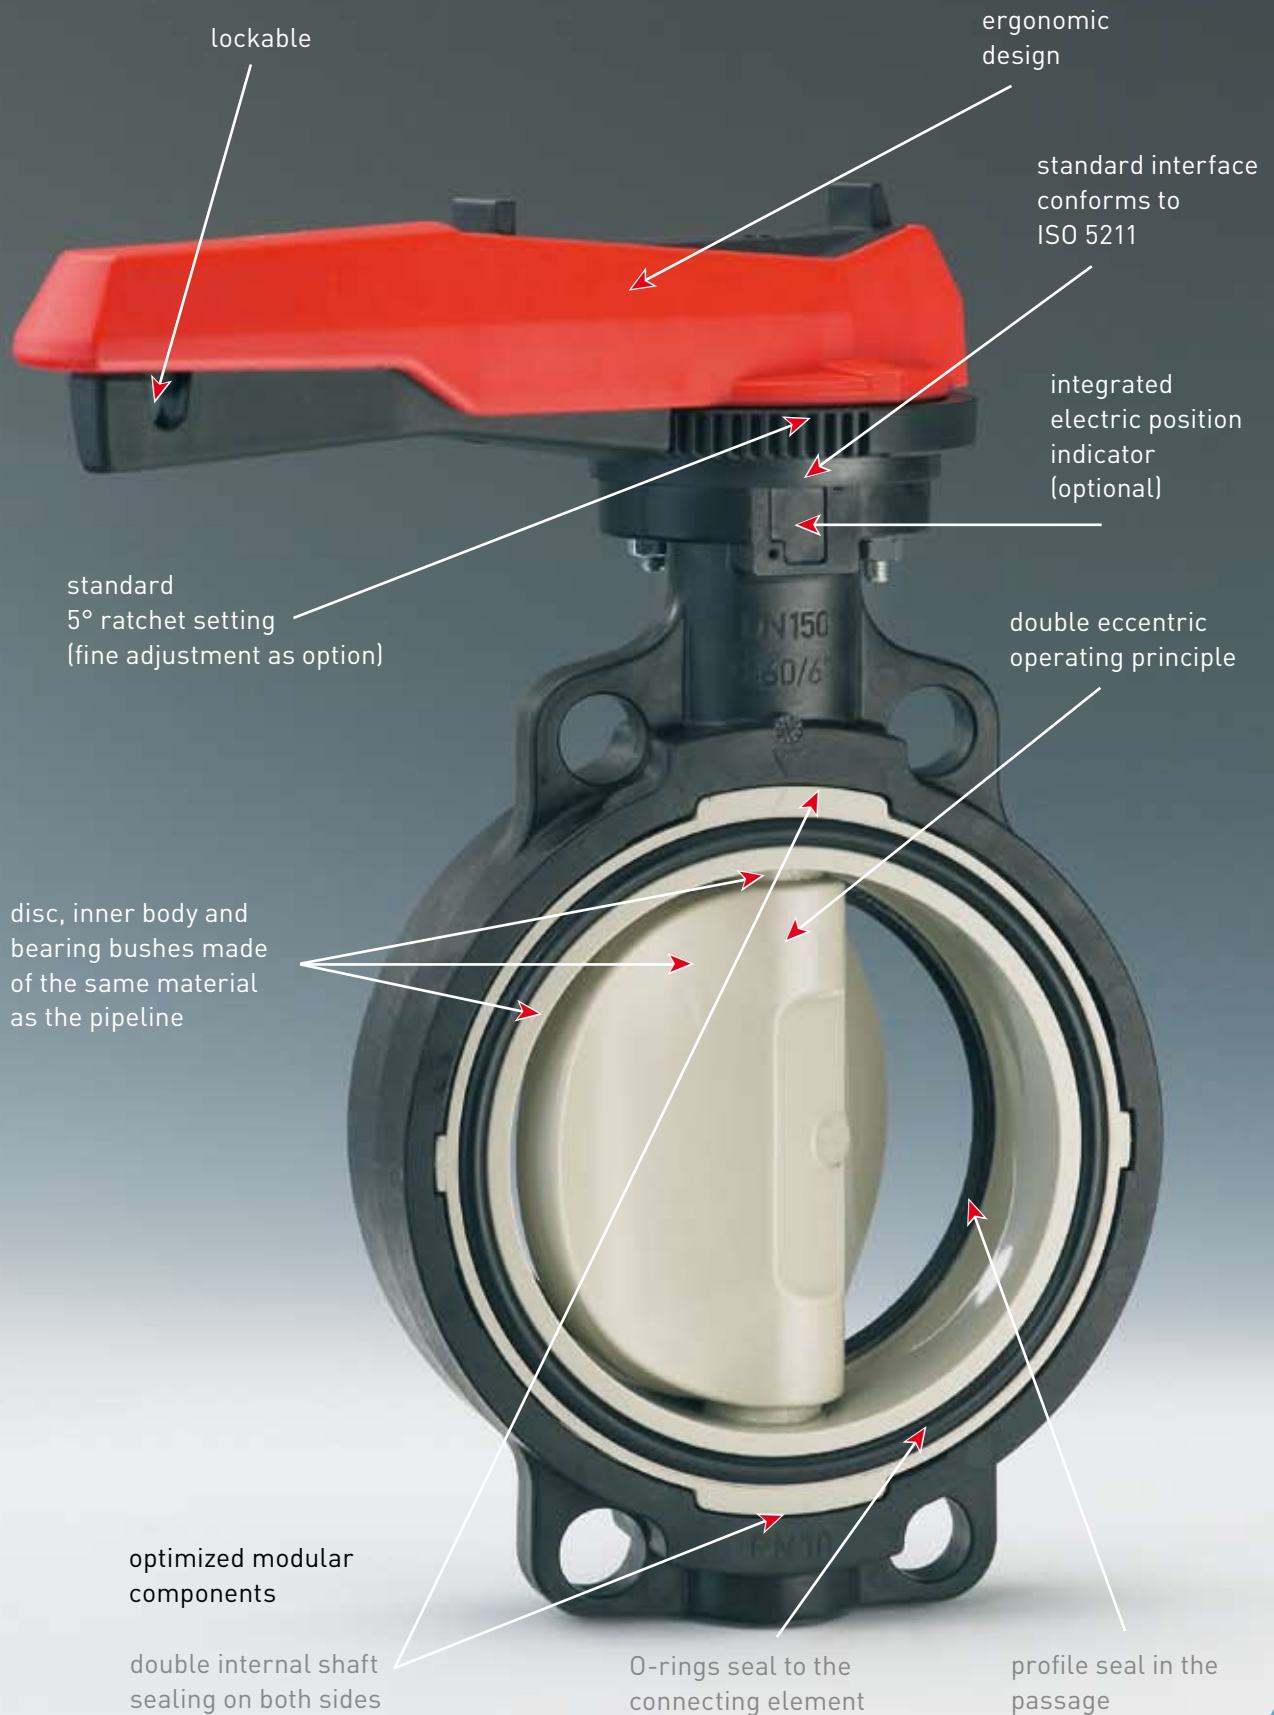

# One system - many options

Georg Fischer presents the new 567/568 type series of butterfly valves with a comprehensive range of products and a multitude of interesting combination possibilities. We can offer you, for example, manual valves with hand lever or reduction gear. The program also includes pneumatically or electrically actuated valves from DN50 to DN200.

Our system's modular design principle allows you to exchange individual system components – fast, easily and at very little expense. You also have a choice of materials: PVC-U, PVC-C, ABS, or  $\beta$ -PP-H and PVDF. Our standard sealing materials are EPDM and FPM, but other materials are available on request.

All the customary installation pipe standards are supplied:

- metric: DIN, EN, ISO
- inch: BS, ASTM
- JIS (only wafer-type valves)

With this wide range of products to choose from you can always be sure of having the best possible solution for your application.

The new butterfly valves type 567/568 from Georg Fischer Piping Systems conform to the following international standards:

**prEN ISO 16136**  
Industrial valves – butterfly valves in thermoplastic materials

**ISO 9393**  
Thermoplastic valves – pressure test methods and requirements

**EN 558**  
Face-to-face length of butterfly valves corresponds to EN 558

**Approvals pending:**  
DIBt, NSF61, TA Luft



**Standard**  
Lug-type butterfly valve/  
end installation  
Type 568

**Standard**  
Wafer-type butterfly  
valve  
Type 567

**Butterfly valve**  
with fine adjustment

**Butterfly valve**  
with reduction gear

**Butterfly valve**  
with pneumatic actuator  
– single acting

**Butterfly valve**  
with pneumatic actuator  
– double acting; optional  
manual override


**Butterfly valve with**  
electric actuator;  
optional manual  
override and electric  
position indicator

# The new butterfly valves type 567/568 from

The name Georg Fischer stands for reliability and longevity and has done so for over 200 years. Our products guarantee quality, innovation and functionality. These qualities have also been incorporated in the design of our new butterfly valves type 567/568. You will find innovative ideas in every detail and all designed to meet your specific needs and requirements – from a safety, technical and business point of view.

## Double eccentric operating principle

Making a statement is important. Especially when you do it with innovative details – like our new type 567/568 butterfly valves. Double eccentricity is the answer.

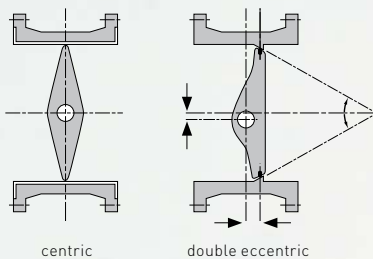

Most butterfly valves are built according to a centric operating principle, ours have a double eccentric design. This means the disc doesn't touch the seal in the open position, thus ensuring good frictional behavior and less wear and tear. In addition, the double eccentric design protects our butterfly valves even better against pressure surges. So they have a longer service life and require less maintenance.

## Integrated electric position indicator

Now, you have a clear overview of your system at all times. Thanks to our integrated electric position indicator, you always know which valves are open and which are closed and this contributes greatly to your and your operators' safety. The electric position indicator integrated in the mounting flange is a totally new feature for butterfly valves. Our feedback concept includes a choice of five different types of limit switches perfectly suited to your needs.

## Lower actuation torque

Our new butterfly valves have an actuation torque which is up to 50% lower than that of our previous model or that of our competitors. They are therefore easier to operate and you can use smaller, more economical actuators. Since the actuation torque largely depends on the internal pressure – usually between 3 and 6 bar – our new butterfly valves are ideal for precisely this pressure range. The maximum allowable nominal pressure at 20°C is 10 bar.

## Optimized modular components

We practice quality. That's why we look at each sealing function separately, optimizing each seal according to its particular function.





# from GF Piping Systems



The new butterfly valves in the dimensions DN 50 to DN 200 have a modular design, offering you a wide range of products to choose from. Our attention to detail sets new standards in regard to economic efficiency, safety and long service life.

We have used three separate sealing elements here:

- ▶ exterior seal: double, internal shaft seal on both sides of disc to protect against external leakage
- ▶ connecting element seal: standard O-rings
- ▶ disc seal: specially engineered profile seal

## Reduced permeation

All the butterfly valve components that come into contact with the medium, such as disc, inner bodies and bearing bushes, are manufactured of the corresponding pipe material. Your benefit: excellent corrosion and chemical resistance.

## New design of functional hand lever

The type 567/568 butterfly valves have been designed taking every detail into consideration, even the hand lever. The following features guarantee even more safety:

- ▶ On standard versions, the indexing is in increments of 5 degrees. There are always six teeth engaged between the ratchet and the index plate.
- ▶ This ensures accurate and safe positioning of the lever.
- ▶ With the fine adjustment option, the disc can be opened at any angle between 0° and 90°.
- ▶ The opening angle is clearly indicated in degrees on the index plate.
- ▶ The hand lever is lockable to prevent it from being moved.
- ▶ The hand lever is made of high strength PPGF (polypropylene, fiberglass reinforced).



The profile seal has been specially engineered for the double eccentric operating principle.

The use of standard O-rings for sealing the pipeline makes installation easy. No displacement, falling out or folding over – as is often the case with other sealing systems.







By integrating the position indicator in the mounting flange, the valve design was kept small and compact.

The ergonomic and practical design, compactness, and robust material of the hand lever makes it very operator friendly.




The proven concept of double, bi-directional sealing against leakage has been implemented which provides maximum reliability and safety. Due to the use of O-rings in standard dimensions, an economical solution with high-quality elastomers has been realized.

# Application data for butterfly valves type 567/568

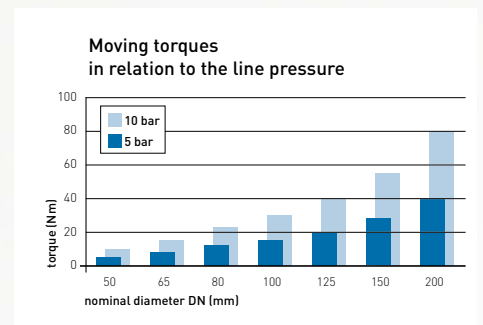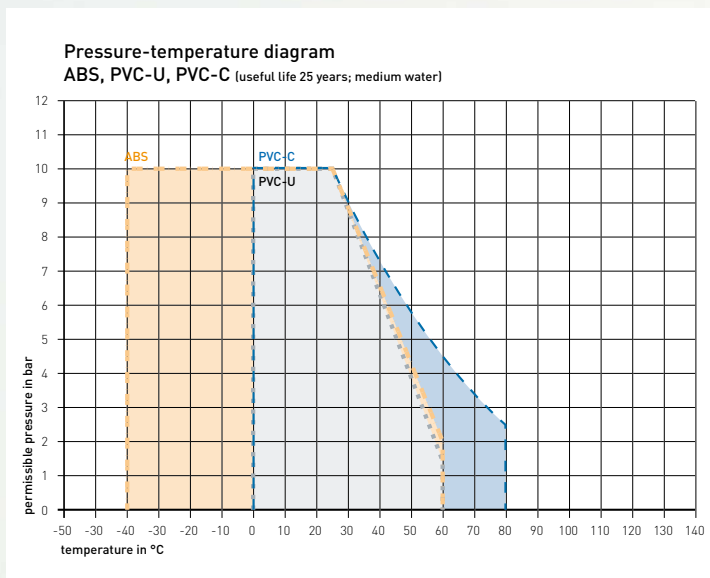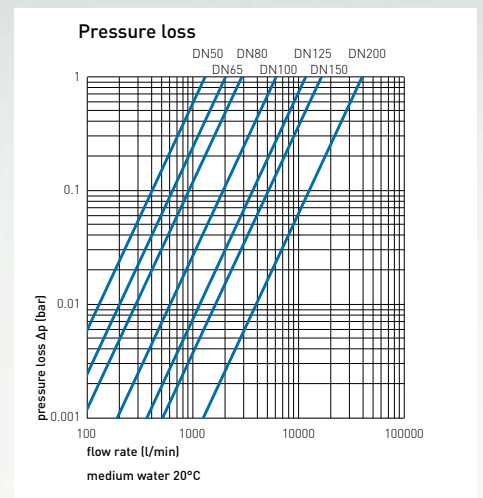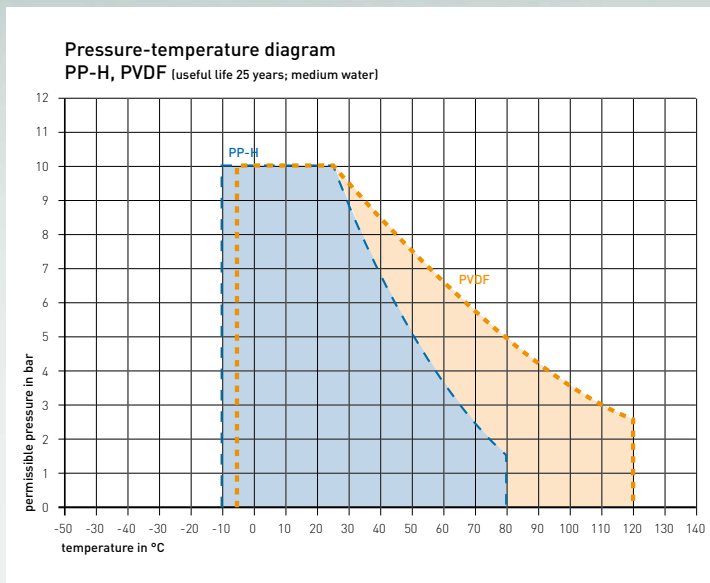

For non-GF actuators, breakaway torques 2.5 to 4 times the value of the moving torque must be taken into consideration, depending on the application conditions (e.g. control time, medium, temperature, etc.).

# Application areas for our butterfly valves

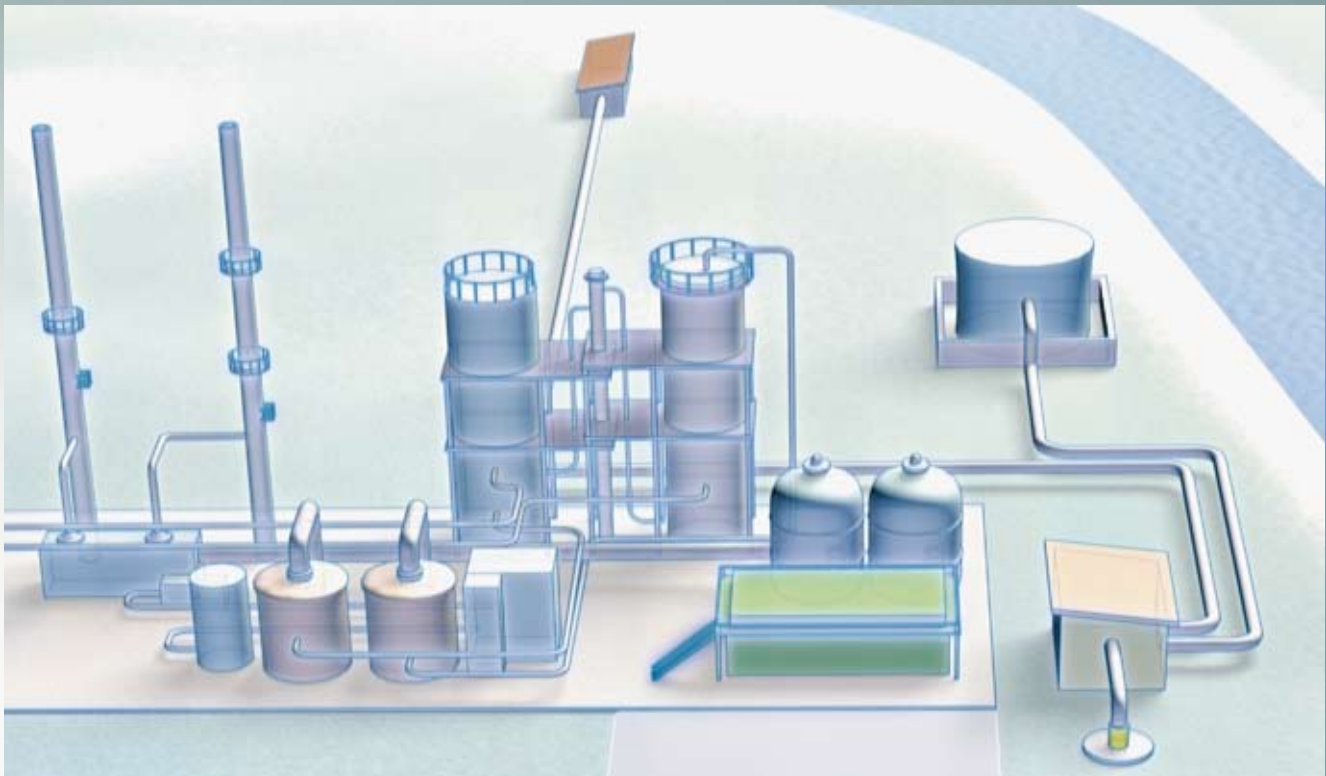

Industrial water treatment, potable water treatment, swimming pools, aquariums, water parks and waste water technology are typical areas of application for butterfly valves from Georg Fischer Piping Systems. Extremely aggressive media needs to be transported in most applications in the chemical industry, chemical distribution, electroplating and in power plants. The combination of aggressive chemicals and conveyed solids often leads to abrasion and corrosion problems, especially for butterfly valves.

Georg Fischer Piping Systems offers its innovative butterfly valves in PVC-U, PVC-C, ABS,  $\beta$ -PP-H and PVDF; the sealing materials EPDM and FPM are standard. In this way, you have the right material for your respective application and medium.

Plastics have the following advantages over metals:

- high resistance to abrasion and corrosion
- lightweight
- very smooth surfaces

The excellent corrosion resistance to aggressive media and external influences prolongs the service life of our butterfly valves.

The extremely smooth surfaces of plastics also have a positive effect on service life because there is less deposit on the surfaces. This means you may also benefit from lower maintenance costs. Plastics also offer easy handling, especially with the time-tested jointing methods developed by Georg Fischer, so assembly is fast and your installation costs are kept low.

# From development to manufacturing – highest quality guaranteed



The materials and valves are continuously subjected to testing, thus complying with the stringent quality standards of Georg Fischer Piping Systems.



Regular quality inspections are done with state-of-the-art equipment in Georg Fischer's EN ISO IEC 17025 accredited test lab.



A 100% leakproof and function test ensures maximum safety and reliability.

The technical data are not binding and not expressly warranted characteristics of the goods. They are subject to change. Our General Conditions of Sale apply.

[www.type567.georgfischer.com](http://www.type567.georgfischer.com)

#### Australia

Georg Fischer Pty Ltd  
Riverwood NSW 2210 Australia  
Phone +61(0)2/9502 8000  
[australia.ps@georgfischer.com](mailto:australia.ps@georgfischer.com)  
[www.georgfischer.com.au](http://www.georgfischer.com.au)

#### Austria

Georg Fischer  
Rohrleitungssysteme GmbH  
3130 Herzogenburg  
Phone +43(0)2782/856 43-0  
[austria.ps@georgfischer.com](mailto:austria.ps@georgfischer.com)  
[www.georgfischer.at](http://www.georgfischer.at)

#### Belgium/Luxembourg

Georg Fischer NV/SA  
1070 Bruxelles/Brüssel  
Phone +32(0)2/556 40 20  
[be.ps@georgfischer.com](mailto:be.ps@georgfischer.com)  
[www.georgfischer.be](http://www.georgfischer.be)

#### Brazil

Georg Fischer Ltda  
04795-100 São Paulo  
Phone +55(0)11/5687 1311  
[br.ps@georgfischer.com](mailto:br.ps@georgfischer.com)

#### China

Georg Fischer  
Piping Systems Ltd Shanghai  
Pudong, Shanghai 201319  
Phone +86(0)21/58 13 33 33  
[china.ps@georgfischer.com](mailto:china.ps@georgfischer.com)  
[www.cn.piping.georgfischer.com](http://www.cn.piping.georgfischer.com)

#### Denmark/ Iceland

Georg Fischer A/S  
2630 Taastrup  
Phone +45 (0)70 22 19 75  
[info.dk.ps@georgfischer.com](mailto:info.dk.ps@georgfischer.com)  
[www.georgfischer.dk](http://www.georgfischer.dk)

#### France

Georg Fischer SAS  
95932 Roissy Charles de Gaulle Cedex  
Phone +33(0)1 41 84 68 84  
[fr.ps@georgfischer.com](mailto:fr.ps@georgfischer.com)  
[www.georgfischer.fr](http://www.georgfischer.fr)

#### Germany

Georg Fischer GmbH  
73095 Albershausen  
Phone +49(0)7161/302-0  
[info.de.ps@georgfischer.com](mailto:info.de.ps@georgfischer.com)  
[www.vgd.georgfischer.de](http://www.vgd.georgfischer.de)

#### India

Georg Fischer Piping Systems Ltd  
400 076 Mumbai  
Phone +91 224007 2001  
[in.ps@georgfischer.com](mailto:in.ps@georgfischer.com)  
[www.georgfischer.in](http://www.georgfischer.in)

#### Italy

Georg Fischer S.p.A.  
20063 Cernusco S/N (MI)  
Phone +3902/921 861  
[it.ps@georgfischer.com](mailto:it.ps@georgfischer.com)  
[www.georgfischer.it](http://www.georgfischer.it)

#### Japan

Georg Fischer Ltd  
556-0011 Osaka,  
Phone +81(0)6/6635 2691  
[jp.ps@georgfischer.com](mailto:jp.ps@georgfischer.com)  
[www.georgfischer.jp](http://www.georgfischer.jp)

#### Korea

Georg Fischer Piping Systems  
Guro-3 dong, Guro-gu, Seoul, Korea  
Phone +82(0)2 2081 1450  
Fax +82(0)2 2081 1453  
[kor.ps@georgfischer.com](mailto:kor.ps@georgfischer.com)

#### Malaysia

Georg Fischer (M) Sdn. Bhd.  
40460 Shah Alam, Selangor  
Phone +60 (0)3-5122 5585  
[conne.kong@georgfischer.com](mailto:conne.kong@georgfischer.com)

#### Mexico

Georg Fischer S.A. de C.V.  
Apodaca, Nuevo Leon  
CP66636 Mexico  
Phone +52 (81)1340 8586  
Fax +52 (81)1522 8906

#### Middle East

Georg Fischer Piping Systems  
Dubai, United Arab Emirates  
Phone +971 4 289 41 20  
[gfdubai@emirates.net.ae](mailto:gfdubai@emirates.net.ae)  
[www.piping.georgfischer.com](http://www.piping.georgfischer.com)

#### Netherlands

Georg Fischer N.V.  
8161 PA Epe  
Phone +31(0)578/678 222  
[nl.ps@georgfischer.com](mailto:nl.ps@georgfischer.com)  
[www.georgfischer.nl](http://www.georgfischer.nl)

#### Norway

Georg Fischer AS  
1351 Rud  
Phone +47(0)67 18 29 00  
[no.ps@georgfischer.com](mailto:no.ps@georgfischer.com)  
[www.georgfischer.no](http://www.georgfischer.no)

#### Poland

Georg Fischer Sp. z o.o.  
02-226 Warszawa  
Phone +48(0)22/313 10 50  
[poland.ps@georgfischer.com](mailto:poland.ps@georgfischer.com)  
[www.georgfischer.pl](http://www.georgfischer.pl)

#### Romania

Georg Fischer  
Piping Systems Ltd  
020257 Bucharest - Sector 2  
Phone +40(0)21/230 53 80  
[ro.ps@georgfischer.com](mailto:ro.ps@georgfischer.com)

#### Russia

Georg Fischer Piping Systems  
Moscow 125047  
Tel. +7 495 258 60 80  
[ru.ps@georgfischer.com](mailto:ru.ps@georgfischer.com)

#### Singapore

Georg Fischer Pte Ltd  
528 872 Singapore  
Phone +65(0)67 47 06 11  
[sgp.ps@georgfischer.com](mailto:sgp.ps@georgfischer.com)  
[www.georgfischer.com.sg](http://www.georgfischer.com.sg)

#### Spain/Portugal

Georg Fischer S.A.  
28046 Madrid  
Phone +34(0)91/781 98 90  
[es.ps@georgfischer.com](mailto:es.ps@georgfischer.com)  
[www.georgfischer.es](http://www.georgfischer.es)

#### Sweden/Finland

Georg Fischer AB  
12523 Älvsjö-Stockholm  
Phone +46(0)8/506 775 00  
[info.se.ps@georgfischer.com](mailto:info.se.ps@georgfischer.com)  
[www.georgfischer.se](http://www.georgfischer.se)

#### Switzerland

Georg Fischer  
Rohrleitungssysteme (Schweiz) AG  
8201 Schaffhausen  
Phone +41(0)52 631 30 26  
[ch.ps@georgfischer.com](mailto:ch.ps@georgfischer.com)  
[www.piping.georgfischer.ch](http://www.piping.georgfischer.ch)

#### Taiwan

Georg Fischer Piping Systems  
San Chung City, Taipei Hsien  
Phone +886 2 8512 2822 Ext. 15  
Fax +886 2 8512 2823  
[www.georgfischer.co.uk](http://www.georgfischer.co.uk)

#### United Kingdom/ Ireland

Georg Fischer Sales Limited  
Coventry, CV2 2ST  
Phone +44(0)2476 535 535  
[uk.ps@georgfischer.com](mailto:uk.ps@georgfischer.com)  
[www.georgfischer.co.uk](http://www.georgfischer.co.uk)

#### USA/ Canada/Latin America/ Caribbean

Georg Fischer Inc.  
Tustin, CA 92780-7258  
Phone +1(714) 731 88 00  
Toll Free 800/854 40 90  
[us.ps@georgfischer.com](mailto:us.ps@georgfischer.com)  
[www.us.piping.georgfischer.com](http://www.us.piping.georgfischer.com)

#### Export

Georg Fischer  
Piping Systems (Switzerland) Ltd.  
8201 Schaffhausen  
Phone +41(0)52-631 30 26  
Fax +41(0)52-631 28 93  
[export.ps@georgfischer.com](mailto:export.ps@georgfischer.com)  
[www.piping.georgfischer.ch](http://www.piping.georgfischer.ch)

GMST 5885/4a (7.07)

© Georg Fischer Piping Systems Ltd.  
8201 Schaffhausen/Switzerland, 2005  
Printed in Switzerland

**+GF+**

**GEORG FISCHER**  
PIPING SYSTEMS