

Plumbing

uponor

Product Catalogue 2026



Table of contents

Flexible Pipe Systems

PEX Pipes	
Aqua Pipe	PE-Xa pipe for tap water installation4
Fittings	
Q&E	Q&E Fittings for modular pipes.....6

Flexible Pipe Systems Tools and Accessories

Q&E Expansion Tools	Tools for Plumbing and Indoor Climate pipes18
Pipe Cutting Tools	Tools for Plumbing and Indoor Climate pipes19
Accessories	20

Multilayer Pipe Systems

Pipes	
Uni Pipe plus and MLCP pipes	Multilayer composite pipe overlapped welded22
Fittings	
S-Press PLUS	Press fittings with safety-test feature and colour code25

Riser System

Fittings	
RS Fittings	Modular fittings for bigger dimensions46


Multilayer Pipe Systems Tools and Accessories

Cutting & Preparation	Tools for Plumbing and Indoor Climate pipes52
Pressing	Tools for Plumbing and Indoor Climate pipes55
Accessories	61



Flexible Pipe Systems

Uponor Aqua Pipe



Uponor Aqua Pipe is manufactured from highest quality cross-linked polyethylene and is designed for tap water application as well as distribution pipes.

Your benefits

- Certified quality
- Corrosion resistant
- Thermal memory
- Lightweight and very flexible
- Durable



Specification

- Pipes manufactured from peroxide cross-linked polyethylene (PE-Xa) acc. EN ISO 15875
- Application class 2 - Hot water supply
- Fire classification E according to DIN EN 13501-1.
- Conduits manufactured from high density polyethylene

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Leakage free tap water installations with possibility to exchange pipes in case of damage


Certification

- WaterMark Certified to AS/NZS 2537.2:2011 Mechanical jointing fittings for use with crosslinked polyethylene (PE-X) for pressure applications Part 2: Plastics piping systems for hot and cold-water installations—Crosslinked polyethylene (PE-X)—Fittings (ISO 15875-3:2003, MOD).
- AS 2492:2007 Cross-Linked polyethylene (PE-X) for pressure applications.




Uponor Aqua Pipe opaque PN20

- Coils



Item no.	Dimension	L m	do mm	s mm	p mm	colour	Qty 2	Qty 1	UOM
35001126786	16x2,2 100m	100	16	2,2	10	white	1100	100	m
35001126787	20x2,8 100m	100	20	2,8	10	white	550	100	m
35001126788	25x3,5 100m	100	25	3,5	10	white	400	100	m

Uponor Aqua Pipe natural in conduit black



Item no.	Dimension	L m	di1 mm	do mm	do1 mm	s mm	p mm	colour	Qty 2	Qty 1	UOM
35001008993	16x2,2 25/20 50m	50	20	16	25	2,2	10	black	550	50	m
35001008994	20x2,8 28/23 50m	50	23	20	28	2,8	10	black	400	50	m

Uponor Aqua Pipe

Uponor Aqua pipes insulated, coils, PN20


Specification

- Pipes manufactured from peroxide cross-linked polyethylene (PE-Xa) acc. EN ISO 15875
- Application class 2 - Hot water supply
- Fire classification E according to DIN EN 13501-1.
- Conduits manufactured from high density polyethylene
- Insulation made of expanded grey closed cell PE-foam with external protective film of extruded polyethylene-LD, CFC free, fire resistance class B1 acc. to DIN EN 13501-1
- Thermal conductivity $\lambda = 0.040$ W/mK, permeability = <1%, diffusion of water vapor 10000 μ .

Application


- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Leakage free tap water installations with possibility to exchange pipes in case of damage

Uponor Aqua pipes insulated, coils, PN20



Item no.	Dimension	L m	do mm	di1 mm	s1 mm	p bar	colour	Qty 2	Qty 1	UOM
35001020240	20x2,8 41x9 50m	50	20	41	2,8	10	grey	450	50	m

Uponor Q&E



Uponor Q&E is a unique and innovative fittings system that uses the shrink-back effect of cross-linked polyethylene PE-Xa pipes for quick and easy installation. A wide range of fittings and accessories makes Q&E a

complete and secure system for cost-effective installation. Corrosion resistance makes it safe, secure and watertight.

Your benefits

- Elasticity of PE-Xa pipes for high safety
- Corrosion resistant
- Low pressure loss
- Ergonomic design of ring
- Easy identification of ring dimension



Specification

- Q&E fittings and rings for Uponor Pex pipes
- Metal fittings are made of high quality brass
- Plastic fittings are made of polyphenylsulphone
- Q&E rings must be ordered separately if not different mentioned

Application

if not different mentioned:

- Male and female threads acc.to EN 10226-1.
- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Leakage free tap water installations with possibility to exchange pipes in case of damage.

Certification

- WaterMark Certified to AS/NZS 2537.2:2011 Mechanical jointing fittings for use with crosslinked polyethylene (PE-X) for pressure applications Part 2: Plastics piping systems for hot and cold-water installations—Crosslinked polyethylene (PE-X)—Fittings (ISO 15875-3:2003, MOD).
- AS 2492:2007 Cross-Linked polyethylene (PE-X) for pressure applications.




Uponor Q&E evolution ring

- Connical inner shape
- With stop edge
- PE material



Item no.	Dimension	l mm	di mm	do mm	z mm	p bar	colour	Qty 2	Qty 1	UOM
35001057453	16	16	16,2	25,3	1	10	white	900	20	pce
35001057454	20	20	20,2	29,2	1	10	white	520	20	pce
35001057455	25	25	25,3	34,6	1	10	white	300	20	pce




Item no.	Dimension	l mm	di mm	do mm	z mm	p bar	colour	Qty 2	Qty 1	UOM
35001058010	16	16	16,2	25,3	1	10	red	900	20	pce
35001058011	20	20	20,2	29,2	1	10	red	520	20	pce
35001058012	25	25	25,3	34,6	1	10	red	300	20	pce



Item no.	Dimension	l mm	di mm	do mm	z mm	p bar	colour	Qty 2	Qty 1	UOM
35001058013	16	16	16,2	25,3	1	10	blue	900	20	pce
35001058014	20	20	20,2	29,2	1	10	blue	520	20	pce
35001058015	25	25	25,3	34,6	1	10	blue	300	20	pce


Uponor Q&E

Uponor Q&E adapter male thread PPSU




Item no.	Dimension	L mm	L1 mm	L2 mm	G inch	z1 mm	p bar	Qty 2	Qty 1	UOM
35001008661	16-G $\frac{1}{2}$ "MI	42	16	18	$\frac{1}{2}$	8	10	90	5	pce
35001008662	20-G $\frac{1}{2}$ "MI	46	16	22	$\frac{1}{2}$	8	10	80	5	pce
35001008663	20-G $\frac{3}{4}$ "MI	48	18	22	$\frac{3}{4}$	8	10	60	5	pce
35001008664	25-G $\frac{3}{4}$ "MI	54	18	28	$\frac{3}{4}$	8	10	50	5	pce
35001008665	25-G1"MI	58	23	28	1	8	10	40	5	pce

Uponor Q&E adapter female thread PPSU




Item no.	Dimension	L mm	L1 mm	L2 mm	Rp inch	z1 mm	p bar	Qty 2	Qty 1	UOM
35001042329	16-Rp $\frac{1}{2}$ "FI	42	17	18	$\frac{1}{2}$	7	10	80	5	pce
35001042330	20-Rp $\frac{1}{2}$ "FI	45	17	22	$\frac{1}{2}$	6	10	60	5	pce
35001042331	20-Rp $\frac{3}{4}$ "FI	47	18	22	$\frac{3}{4}$	7	10	50	5	pce
35001042332	25-Rp $\frac{3}{4}$ "FI	52	18	28	$\frac{3}{4}$	6	10	40	5	pce

Uponor Q&E adapter swivel nut PPSU




Item no.	Dimension	L mm	L1 mm	L2 mm	G inch	z1 mm	p bar	Qty 2	Qty 1	UOM
35001038021	16-G $\frac{1}{2}$ "SN	35	8	18	$\frac{1}{2}$	9	10	50	1	pce
35001038022	20-G $\frac{1}{2}$ "SN	47	9	22	$\frac{1}{2}$	16	10	40	1	pce
35001038023	20-G $\frac{3}{4}$ "SN	39	8	22	$\frac{3}{4}$	9	10	30	1	pce
35001038024	25-G $\frac{3}{4}$ "SN	53	8	28	$\frac{3}{4}$	17	10	25	1	pce
35001038025	25-G1"SN	46	10	27	1	9	10	25	1	pce

Uponor Q&E coupling PPSU



Item no.	Dimension	L mm	L1 mm	L2 mm	z1 mm	p bar	Qty 2	Qty 1	UOM
35001008669	16-16	39	18	18	3	10	100	5	pce
35001008932	20-20	47	22	22	3	10	80	5	pce
35001008671	25-25	58	28	28	3	10	50	5	pce


Uponor Q&E reducer PPSU



Item no.	Dimension	L mm	L1 mm	L2 mm	z1 mm	p bar	Qty 2	Qty 1	UOM
35001008674	20-16	43	22	18	3	10	100	5	pce
35001008675	25-16	49	28	18	3	10	40	5	pce
35001008676	25-20	53	22	28	3	10	40	5	pce


Uponor Q&E

Uponor Q&E elbow adapter male thread PPSU




Item no.	Dimension	l1 mm	l2 mm	G inch	z1 mm	z2 mm	p bar	Qty 2	Qty 1	UOM
35001008666	16-G $\frac{1}{2}$ "MI	31	34	$\frac{1}{2}$	15	16	10	80	5	pce
35001008667	20-G $\frac{1}{2}$ "MI	31	38	$\frac{1}{2}$	15	16	10	60	5	pce
35001008668	25-G $\frac{3}{4}$ "MI	36	42	$\frac{3}{4}$	18	15	10	40	5	pce

Uponor Q&E elbow adapter female thread PPSU




Item no.	Dimension	l1 mm	l2 mm	Rp inch	z1 mm	z2 mm	p bar	Qty 2	Qty 1	UOM
35001042334	16-Rp $\frac{1}{2}$ "FI	27	33	$\frac{1}{2}$	10	15	10	50	5	pce
35001042335	20-Rp $\frac{1}{2}$ "FI	27	38	$\frac{1}{2}$	9	16	10	50	5	pce
35001042336	20-Rp $\frac{3}{4}$ "FI	30	41	$\frac{3}{4}$	12	19	10	40	5	pce
35001042337	25-Rp $\frac{3}{4}$ "FI	32	47	$\frac{3}{4}$	14	19	10	35	5	pce

Uponor Smart Aqua tap elbow Q&E PPSU



Item no.	Dimension	l1 mm	l2 mm	l3 mm	Rp inch	z1 mm	z2 mm	k mm	p bar	Qty 2	Qty 1	UOM
35001042342	16-Rp $\frac{1}{2}$ " l=43mm	34	17	27	$\frac{1}{2}$	16	10	36	10	40	5	pce
35001042343	20-Rp $\frac{1}{2}$ " l=43mm	38	17	27	$\frac{1}{2}$	16	10	36	10	30	5	pce


Uponor Smart Aqua tap elbow long Q&E PPSU



Item no.	Dimension	l1 mm	l2 mm	l3 mm	Rp inch	z1 mm	z2 mm	k mm	p bar	Qty 2	Qty 1	UOM
35001042344	16-Rp $\frac{1}{2}$ " l=49mm	34	165	33	$\frac{1}{2}$	16	16	36	10	35	5	pce


Uponor Q&E

Uponor Q&E elbow adapter swivel nut PPSU




Item no.	Dimension	l1 mm	l2 mm	G inch	z1 mm	z2 mm	p bar	Qty 2	Qty 1	UOM
35001038037	16-G $\frac{1}{2}$ "SN	36	27	$\frac{1}{2}$	28	9	10	40	1	pce
35001038038	20-G $\frac{1}{2}$ "SN	38	31	$\frac{1}{2}$	30	10	10	35	1	pce
35001038039	20-G $\frac{3}{4}$ "SN	38	34	$\frac{3}{4}$	29	12	10	25	1	pce

Uponor Q&E elbow PPSU




Item no.	Dimension	l1 mm	l2 mm	z1 mm	z2 mm	p bar	Qty 2	Qty 1	UOM
35001008679	16-16	27	32	9	13	10	100	5	pce
35001008680	20-20	34	39	12	16	10	40	5	pce
35001008681	25-25	42	47	14	19	10	25	5	pce

Uponor Q&E tee adapter female thread PPSU



Item no.	Dimension	l1 mm	l2 mm	l3 mm	Rp mm	z1 mm	z2 mm	z3 mm	p bar	Qty 2	Qty 1	UOM
35001042338	16-Rp $\frac{1}{2}$ "FI-16	33	28	33	$\frac{1}{2}$	15	10	15	10	50	5	pce
35001042339	20-Rp $\frac{1}{2}$ "FI-20	38	27	38	$\frac{1}{2}$	16	10	16	10	40	5	pce
35001042340	25-Rp $\frac{1}{2}$ "FI-25	43	30	43	$\frac{1}{2}$	15	13	15	10	25	5	pce
35001042341	25-Rp $\frac{3}{4}$ "FI-25	47	31	47	$\frac{3}{4}$	19	13	19	10	25	5	pce


Uponor Q&E tee PPSU



Item no.	Dimension	l1 mm	l2 mm	l3 mm	z1 mm	z2 mm	z3 mm	p bar	Qty 2	Qty 1	UOM
35001008684	16-16-16	32	27	32	14	10	14	10	60	5	pce
35001008685	20-20-20	39	34	39	17	12	17	10	30	5	pce
35001008686	25-25-25	47	42	47	20	15	20	10	20	5	pce

Uponor Q&E


Uponor Q&E tee reducer PPSU



Item no.	Dimension	l1 mm	l2 mm	l3 mm	z1 mm	z2 mm	z3 mm	p bar	Qty 2	Qty 1	UOM
35001008710	16-20-16	35	33	35	17	11	17	10	40	5	pce
35001008700	20-16-16	36	29	32	14	11	14	10	40	5	pce
35001008689	20-16-20	36	29	36	14	11	14	10	40	5	pce
35001008697	20-20-16	36	34	32	14	12	14	10	40	5	pce
35001008711	20-25-20	42	40	42	20	12	20	10	25	5	pce
35001008702	25-16-16	41	32	32	14	14	14	10	25	5	pce
35001008699	25-16-20	41	32	36	14	14	14	10	25	5	pce
35001008690	25-16-25	41	32	41	14	14	14	10	25	5	pce
35001008701	25-20-16	44	37	35	17	15	17	10	25	5	pce
35001008703	25-20-20	44	37	39	17	15	17	10	25	5	pce
35001008691	25-20-25	44	37	44	17	15	17	10	20	5	pce
35001001420	25-25-20	47	42	42	20	15	20	10	20	5	pce


Uponor Q&E manifold PPSU

- Main connection for Q&E 25 mm

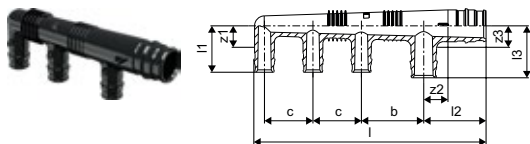

Item no.	Dimension	outlets	l mm	l1 mm	l2 mm	l3 mm	z1 mm	z2 mm	z3 mm	b mm	b1 mm	p bar	Qty 2	Qty 1	UOM
35001008718	25, 3X16 c/c45+35	3	133	34	45	34	16	18	16	45	35	10	15	1	pce
35001008719	25 4X16 c/c45+2X35	4	168	34	45	34	16	18	16	45	35	10	15	1	pce

Uponor Q&E manifold male thread PPSU

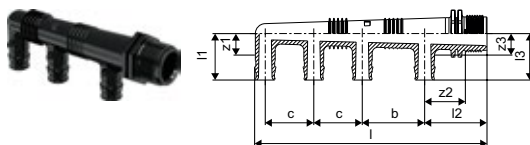

Item no.	Dimension	outlets	l mm	l1 mm	l2 mm	l3 mm	z1 mm	z2 mm	z3 mm	b mm	b1 mm	p bar	Qty 2	Qty 1	UOM
35001008714	G $\frac{3}{4}$ "MI 3X16 c/c45+35mm	3	133	34	45	34	16	29	16	45	35	10	10	1	pce
35001008715	G $\frac{3}{4}$ "MI 4X16 c/c45+2X35mm	4	168	34	45	34	16	29	16	45	35	10	10	1	pce
35001008716	G $\frac{3}{4}$ "MI 1X20+2X16 c/c45+35mm	3	133	34	45	38	16	29	16	45	35	10	10	1	pce
35001008717	G $\frac{3}{4}$ "MI 1X20+3X16 c/c45+2X35mm	4	168	34	45	38	16	29	16	45	35	10	10	1	pce

Uponor Q&E

Uponor Q&E Lead-Free DR-brass coupling

Specification

- Made of DR brass. Male thread acc.to DIN EN 10226-1 and AS2537.
- Q&E rings must be ordered separately if not different mentioned


Application

- For tap water installations

if not different mentioned:


- Male and female threads acc.to EN 10226-1 and AS2537.

Uponor Q&E DR Brass adapter male tapered thread LF




Item no.	Dimension	I	I1	I2	R	z1	p		Qty 2	Qty 1	UOM
35001126814	16-R½"MT	41	12	18	½	12	10		100	5	pce
35001126815	16-R¾"MT	43	13	18	¾	12	10		80	5	pce
35001126816	20-R½"MT	45	12	22	½	12	10		100	5	pce
35001126817	20-R¾"MT	47	13	22	¾	12	10		70	5	pce
35001126818	20-R1"MT	48	15	22	1	12	10		70	5	pce
35001126819	25-R¾"MT	52	13	27	¾	12	10		70	5	pce
35001126820	25-R1"MT	53	15	27	1	12	10		40	5	pce

Uponor Q&E DR Brass adapter female thread LF



Item no.	Dimension	I	I1	I2	Rp	z1	p		Qty 2	Qty 1	UOM
35001126809	16-Rp½"FT	39	15	18	½	6	10		60	5	pce
35001126810	20-Rp½"FT	43	15	22	½	6	10		60	5	pce
35001126811	20-Rp¾"FT	44	17	22	¾	5	10		40	5	pce
35001126812	20-Rp1"FT	49	22	22	1	5	10		40	5	pce
35001126813	25-Rp1"FT	54	22	27	1	5	10		35	5	pce

Uponor Q&E DR-Brass adapter swivel nut LF



Item no.	Dimension	I	I1	I2	G	z1	p		Qty 2	Qty 1	UOM
35001126821	16-G½"SN	36	8	18	½	10	10		100	5	pce
35001126822	20-G½"SN	47	8	22	½	17	10		60	5	pce
35001126823	20-G¾"SN	41	9	22	¾	10	10		50	5	pce
35001126824	25-G¾"SN	53	9	27	¾	17	10		60	5	pce
35001126825	25-G1"SN	49	11	27	1	11	10		50	5	pce

Uponor Q&E

Uponor Q&E DR-Brass coupling LF




Item no.	Dimension	d mm	d1 mm	p bar	Qty 2	Qty 1	UOM
35001126789	16-16	16	16	10	100	5	pce
35001126790	20-20	20	20	10	80	5	pce
35001126791	25-25	25	25	10	40	5	pce

Uponor Q&E DR-Brass coupling with reducer LF




Item no.	Dimension	d mm	d1 mm	p bar	Qty 2	Qty 1	UOM
35001126792	16-20	16	20	10	100	5	pce
35001126793	16-25	16	25	10	80	5	pce
35001126794	20-25	20	25	10	40	5	pce

Uponor Q&E DR-Brass elbow adapter male thread LF




Item no.	Dimension	l1 mm	l2 mm	G inch	z1 mm	z2 mm	p bar	Qty 2	Qty 1	UOM
35001126831	16-G½"MT	27	32	½	14	14	10	80	5	pce
35001123832	20-G½"MT	30	40	½	17	18	10	50	5	pce
35001123833	20-R½"MT	30	40	½	17	18	10	200	5	pce
35001123834	20-G¾"MT	31	40	¾	17	18	10	40	5	pce
35001126871	25-G¾"MT	37	46	¾	20	19	10	40	5	pce

Uponor Q&E DR-Brass elbow adapter female thread LF



Item no.	Dimension	l1 mm	l2 mm	G inch	z1 mm	z2 mm	p bar	Qty 2	Qty 1	UOM
35001126835	16-G½"FT	29	32	½	11	14	10	200	5	pce
35001126836	20-G¾"FT	36	39	¾	17	17	10	200	5	pce
35001126837	25-G¾"FT	39	46	¾	20	19	10	100	5	pce

Uponor Q&E DR-Brass elbow adapter swivel nut LF



Item no.	Dimension	l1 mm	l2 mm	G inch	z1 mm	z2 mm	p bar	Qty 2	Qty 1	UOM
35001126826	16-G½"SN	36	33	½	28	15	10	70	5	pce
35001126827	20-G½"SN	36	33	½	28	11	10	50	5	pce

Uponor Q&E

Uponor Smart Aqua

Specification

- Elbows for tap connection and
- Q&E rings must be ordered separately if not different mentioned

Application


- For tap water installations

if not different mentioned:

- Male and female threads acc.to EN 10226-1.


Uponor Smart Aqua U-tap elbow Q&E

- U elbow for loop installation



Item no.	Dimension	l1 mm	l2 mm	l3 mm	Rp inch	z1 mm	z2 mm	b mm	k mm	Qty 2	Qty 1	UOM
35001059820*	16-Rp½"FT-16	52	20	20	½	34	5	45	40	5	1	pce
35001059821*	20-Rp½"FT-20	56	20	20	½	35	5	45	40	5	1	pce

Uponor Smart Aqua tap elbow Q&E LF



Item no.	Dimension	l1 mm	l2 mm	l3 mm	Rp inch	z1 mm	z2 mm	p bar	Qty 2	Qty 1	UOM
35001126828	16-½"	37	15	26	½	19	5	10	150	5	pce
35001126869	20-½"	41	15	26	½	19	5	10	100	5	pce
35001126830	20-¾"	44	15	27	¾	22	5	10	100	5	pce

Uponor Q&E DR-brass BP elbow LF



Item no.	Dimension	d mm	FT inch	p bar	l mm	Qty 2	Qty 1	UOM
35001126841	16-½"G MT	16	G½	10	65	100	5	pce
35001126842	16-½"G MT	16	G½	10	90	100	5	pce
35001126843	16-½"G MT	16	G½	10	175	50	5	pce
35001126844	16-½"G MT	16	G½	10	200	50	5	pce
35001126845	20-½"G MT	20	G½	10	95	80	5	pce
35001126846	20-¾"G MT	20	G¾	10	200	100	5	pce
35001126847	20-¾"G MT	20	G¾	10	100	50	5	pce

Uponor Q&E

Uponor Q&E DR-brass elbow 90 deg LF



Item no.	Dimension	d mm	d1 mm	p bar	Qty 2	Qty 1	UOM
35001126795	16-16	16	16	10	250	5	pce
35001126796	20-20	20	20	10	200	5	pce
35001126797	25-25	25	25	10	100	5	pce

Uponor Q&E DR-brass tee female LF



Item no.	Dimension	d mm	FT inch	d1 mm	p bar	Qty 2	Qty 1	UOM
35001126838	25-1/2-25	25	1/2	25	10	80	5	pce
35001126839	25-3/4-25	25	3/4	25	10	80	5	pce

Uponor Q&E DR-brass tee equal LF



Item no.	Dimension	d mm	d1 mm	d2 mm	p bar	Qty 2	Qty 1	UOM
35001126798	16-16-16	16	16	16	10	70	5	pce
35001126799	20-20-20	20	20	20	10	35	5	pce
35001126800	25-25-25	25	25	25	10	20	5	pce

Uponor Q&E DR-Brass tee with reducer LF



Item no.	Dimension	d mm	d1 mm	d2 mm	p bar	Qty 2	Qty 1	UOM
35001126801	16-20-16	16	20	16	10	40	5	pce
35001126802	20-16-16	20	16	16	10	40	5	pce
35001126803	20-16-20	20	16	20	10	40	5	pce
35001126804	20-20-16	20	20	16	10	40	5	pce
35001126805	25-16-25	25	16	25	10	40	5	pce
35001126806	25-20-25	25	20	25	10	40	5	pce

Uponor Q&E

Uponor Q&E DR-Brass adapter LF



Item no.	Dimension	d mm	d1 inch	p bar	Qty 2	Qty 1	UOM
35001126848	16-15cu (for soldering)	16	½	10	100	5	pce
35001126849	20-15/22cu (for soldering)	20	½	10	100	5	pce
35001126850	20-¾"cu (for soldering)	20	¾	10	100	5	pce
35001126851	25-1"cu (for soldering)	20	1	10	100	5	pce

Uponor Q&E DR-Brass CU-Press adapter LF




Item no.	Dimension	d mm	d1 inch	p bar	Qty 2	Qty 1	UOM
35001126852	16-½"cu press	16	½	10	100	5	pce
35001126853	20-¾"cu press	20	¾	10	100	5	pce
35001126850	25-1"cu press	25	1	10	100	5	pce

Uponor Q&E DR-Brass plugs LF



Item no.	Dimension	d mm	p bar	Qty 2	Qty 1	UOM
35001126807	16	16	10	100	5	pce
35001126808	20	20	10	80	5	pce

Uponor Q&E DR-Brass adapter S-Press



Item no.	Dimension	l mm	l1 mm	l2 mm	z1 mm	Qty 2	Qty 1	UOM
35001062845	16-Q&E16	47	22	18	8	20	1	pce
35001062846	20-Q&E20	52	23	22	8	10	1	pce
35001062861	25-Q&E25	65	31	27	8	10	1	pce



Flexible Pipe Systems Tools and Accessories

Uponor PEX Tools

Uponor Q&E Expansion tool with heads M12 Set

- Electromechanical driving machine, delivered in a plastic case including two 12V Li-Ion rechargeable batteries and one quick charger 220-240V/50-60Hz and lubricant (Mo).
- Metal gearbox and metal housing. Incl. LED working light.
- Instruction manual in the case. Automatic rotation with M12 expanding heads.
- Use for 6 bar pipes in dimensions up to 32 mm.
- Insert for 10 bar pipes in dimensions up to 25 mm..

Technical data:

- Charging voltage: 12 V
- Charge level display: Optical display
- Battery charging time: approx. 0.5 hrs.
- For dimensions: ≤ 32 mm (AK5/6 bar), ≤ 25 mm (AK2/10 bar)



Item no.	Dimension	Qty 1	UOM
35001057167	16/20/25 10bar	1	set

Uponor Q&E Expansion head M12/Rapid Seal

- Suitable for Q&E expanding tool M12 / M12 FUEL



Item no.	Dimension	Qty 1	UOM
35001119380	9,9x1.1	1	pce

Uponor Q&E expansion head M12/M18

- Suitable for Q&E expanding tool M12 / M12 FUEL



Item no.	Dimension	d mm	s mm	p bar	stroke mm	Qty 1	UOM
35001057172	16x1,8/2,0/2,2	16	1,8/2,0/2,2	10	14/25	1	pce
35001057174	20x2,8	20	2,8	10	14/25	1	pce
35001057176	25x3,5	25	3,5	10	14/25	1	pce

Uponor Q&E expansion tool spare battery M12



Item no.	Dimension	Qty 2	Qty 1	UOM
35001061185	4Ah	12	1	pce

Uponor PEX Tools

Uponor Q&E expansion tool charger M12/M18 PEX



Item no.	Dimension	OV V	Qty 1	UOM
35001085101	220-240V/50-60Hz	230	1	pce

Uponor Multi pipe & conduit cutting tool

- Easy cutting with a special triangle blade
- outside diameters 12-25 mm



Item no.	Dimension	Qty 2	Qty 1	UOM
35001089674	12-25	36	1	pce
35001089776	12-25 blade	150	1	pce

Uponor Flex pipe cutting tool PEX

- Pipe cutting tool for Uponor flexible pipes, outside diameters 12-25 mm.
- Blades not compatible with Uponor pipe cutter 1001369



Item no.	Dimension	Qty 2	Qty 1	UOM
35001089673	12-25	36	1	pce

Uponor Q&E graphite paste



Item no.	Dimension	Weight kg	Qty 1	UOM
35001005017	100g	0,10	1	pce

Uponor Accessories

Uponor plastic pipe bend support

Made of impact resistant plastic as bend support 90° bends.



Item no.	Dimension	d mm	r mm	Qty 2	Qty 1	UOM
35001009004	16	16	90	2340	10	pce
35001009233	20	20	100	2340	10	pce

Uponor Galvanised Steel pipe bend support

Made of galvanised steel as bend support 90° bends.



Item no.	Dimension	d mm	r mm	Qty 2	Qty 1	UOM
35001009006	25 Galv. Steel	20	90	5000	20	pce



Multilayer Pipe Systems

Uponor Uni Pipe PLUS



The Uni Pipe PLUS is Uponor's unique multilayer composite pipe for tap water and heating/cooling application. Its bend radius is up to 40 per cent smaller than current multilayer composite pipes: changes of

direction when installing can be achieved by bending the pipe, reducing fitting requirements and installation time.

Your benefits

- Seamless or OWC-technology for highest level of safety
- High dimensional stability, low expansion rates
- Increased flexibility
- 100% oxygen barrier
- Lightweight



Specification

- Oxygen diffusion resistant multi-layer composite pipe (PE-RT - adhesive – seamless aluminium/longitudinally welded aluminium - adhesive - PE-RT) produced using SACP and OWC-technology.
- Fire classification E according to EN 13501-1.
- With pipe end caps as hygienic seal according to EN 806.

Application


- Tested/Approved according to EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar
- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

Certification

- WaterMark Certified to AS 4176.2:2010 Multilayer pipes for pressure application Part 2: Multilayer piping Systems for hot and cold water plumbing applications- Pipes (ISO 21003-2:2008, MOD)
- AS 4176.3:2010 Multilayer pipes for pressure applications Part 3: Multilayer piping systems for hot and cold water plumbing applications—Fittings (ISO 21003-3:2008, MOD)




Uponor Uni Pipe PLUS white S



Item no.	Dimension	L do s m mm mm	Qty 2	Qty 1	UOM
35001059572	16x2,0 5m	5 16 2,0	125	5	m
35001059573	20x2,25 5m	5 20 2,25	85	5	m
35001059574	25x2,5 5m	5 25 2,5	50	5	m
35001059575	32x3,0 5m	5 32 3	35	5	m

Uponor MLC pipe white S

- bar




Item no.	Dimension	L do s m mm mm	Qty 2	Qty 1	UOM
35001013446	40x4,0 5m	5 40 4	20	5	m
35001013449	50x4,5 5m	5 50 4,5	20	5	m
35001013451	63x6,0 5m	5 63 6	15	5	m
35001013453	75x7,5 5m	5 75 7,5	255	5	m
35001013455	90x8,5 5m	5 90 8,5	255	5	m
35001013457	110x10,0 5m	5 110 10	165	5	m

Uponor Uni Pipe PLUS

Uponor Uni Pipe PLUS white

- coil



Item no.	Dimension	L m	do mm	s mm	Qty 2	Qty 1	UOM
35001059576	16x2,0 100m	100	16	2,0	2000	100	m
35001059578	16x2,0 500m	500	16	2,0	3500	500	m
35001059577	16x2,0 200m	200	16	2	2600	200	m
35001059579	20x2,25 100m	100	20	2,25	1300	100	m
35001059581	25x2,5 50m	50	25	2,5	700	50	m
35001059583	32x3,0 50m	50	32	3	400	50	m

Uponor Uni Pipe PLUS


Uponor Uni Pipe PLUS insulated

Specification

- Consists of pipe and insulating layer.
- Supplied in coils.
- pipe insulation made of polyethylene foam with closed-cell material structure.
- With sturdy, seamless foil coating

Uponor Uni Pipe PLUS white insulated S10 WLS 035


- coil
- Insulation thickness 10 mm
- thermal conductivity $\lambda=0,035 \text{ W/m}^{\circ}\text{K}$
- round extruded



Item no.	Dimension	L m	do mm	do1 mm	s mm	s1 mm	colour	Qty 2	Qty 1	UOM
35001062181	16x2,0 blue 75m	75	16	36	2	10	blue	450	75	m
35001062182	20x2,25 blue 75m	75	20	40	2,25	10	blue	525	75	m
35001062183	25x2,5 blue 50m	50	25	45	2,5	10	blue	350	50	m

Uponor Uni Pipe PLUS white insulated S13 BL-S2-D0


- coil
- Insulation thickness 13 mm
- thermal conductivity $\lambda=0,04 \text{ W/m}^{\circ}\text{K}$
- round extruded



Item no.	Dimension	L m	do mm	do1 mm	s mm	s1 mm	colour	Qty 2	Qty 1	UOM
35001093952	16x2,0 blue 75m	75	16	42	2	13	blue	450	75	m
35001093953	16x2,0 red 75m	75	16	42	2	13	red	450	75	m
35001093954	20x2,25 blue 75m	75	20	46	2,25	10	blue	450	75	m
35001093955	20x2,25 red 75m	75	20	46	2,25	10	red	450	75	m
35001094883	25x2,5 blue 50m	50	25	51	2,5	10	blue	200	50	m

Uponor Uni Pipe PLUS white insulated S15 Clima


- coil
- Insulation thickness 15 mm
- thermal conductivity $\lambda=0,040 \text{ W/m}^{\circ}\text{K}$
- round extruded



Item no.	Dimension	L m	do mm	do1 mm	s mm	s1 mm	colour	Qty 2	Qty 1	UOM
35001088239	32x3,0 blue 25m	23	32	62	3	15	blue	225	25	m


Uponor Uni Pipe PLUS white in conduit

- pipe in conduit



Item no.	Dimension	L m	di1 mm	do mm	do1 mm	s mm	colour	Qty 2	Qty 1	UOM
35001063059	16x2,0 - 25/20 blue 75m	75	20	16	25	2,0	blue	1125	75	m
35001063060	20x2,25 - 28/23 blue 75m	75	23	20	28	2,25	blue	900	75	m
35001063061	16x2,0 - 25/20 red 75m	75	20	16	25	2,0	red	1125	75	m
35001063062	20x2,25 - 28/23 red 75m	75	23	20	28	2,25	red	900	75	m

Uponor S-Press PLUS



S-Press PLUS/ S-Press, our new generation of press fittings, is the perfect solution for ensuring permanently tight pipe connections. It's 100% backward compatible with current Uponor composite pipes and tools.

Available in dimensions from 16 to 75 mm in both metal and plastic, S-Press PLUS/ S-Press are the fittings that knows no compromise.

Your benefits

- **TOUGH:** Withstand harshest conditions
- **SAFE:** Ensuring your perfect pressing result
- **EASY:** Simplifying planning and installation
- **SMART:** Answering all your questions on site



Specification

- Fixed press sleeve with inspection window
- Precise jaw fixation
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:

- Male and female threads acc.to EN 10226-1.

Certification

- WaterMark Certified to AS 4176.2:2010 Multilayer pipes for pressure application Part 2: Multilayer piping Systems for hot and cold water plumbing applications- Pipes (ISO 21003-2:2008, MOD)
- AS 4176.3:2010 Multilayer pipes for pressure applications Part 3: Multilayer piping systems for hot and cold water plumbing applications—Fittings (ISO 21003-3:2008, MOD)



Uponor S-Press PLUS/ S-Press made of PPSU


Specification

- made of PPSU

Uponor S-Press PLUS

Uponor S-Press PLUS elbow PPSU


- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour code



Item no.	Dimension	l1 mm	l2 mm	z1 mm	z2 mm	Qty 2	Qty 1	UOM
35001039929	16-16	33	33	13	13	80	20	pce
35001039930	20-20	37	37	16	16	80	10	pce
35001039931	25-25	48	48	19	19	80	10	pce
35001039932	32-32	51	51	23	23	20	5	pce

Uponor S-Press composite elbow PPSU


- Fast installation with easy bevel and without calibration
- Colour code



Item no.	Dimension	l1 mm	l2 mm	z1 mm	z2 mm	Qty 2	Qty 1	UOM
35001046386	40-40	68	68	29	29	960	5	pce
35001046387	50-50	73	73	34	34	576	3	pce
35001032877	63-63	101	101	40	40	210	1	pce
35001032878	75-75	108	108	47	47	210	1	pce

Uponor S-Press composite elbow 45° PPSU

- Fast installation with easy bevel and without calibration
- Colour code




Item no.	Dimension	l1 mm	l2 mm	z1 mm	z2 mm	Qty 2	Qty 1	UOM
35001046388	40-40	56	56	17	17	960	5	pce
35001046389	50-50	59	59	20	20	576	3	pce
35001032879	63-63	83	83	23	23	192	1	pce
35001032880	75-75	86	86	25	25	192	1	pce

Uponor S-Press PLUS

Uponor S-Press PLUS coupling PPSU


- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour code



Item no.	Dimension	L mm	L1 mm	L2 mm	z1 mm	Qty 2	Qty 1	UOM
35001039933	16-16	51	20	20	11	80	20	pce
35001039934	20-20	54	21	21	11	80	10	pce
35001039935	25-25	68	28	28	11	80	10	pce
35001039936	32-32	69	28	28	13	80	10	pce

Uponor S-Press composite coupling PPSU


- Fast installation with easy bevel and without calibration
- Colour code



Item no.	Dimension	L mm	L1 mm	L2 mm	z1 mm	Qty 2	Qty 1	UOM
35001046401	40-40	91	39	39	13	960	5	pce
35001046402	50-50	91	39	39	13	576	3	pce
35001032881	63-63	137	61	61	15	384	1	pce
35001032882	75-75	137	61	61	15	384	1	pce

Uponor S-Press PLUS reducer PPSU

- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour code




Item no.	Dimension	L mm	L1 mm	L2 mm	z1 mm	Qty 2	Qty 1	UOM
35001039937	20-16	53	21	20	11	80	20	pce
35001039938	25-16	60	28	20	11	80	10	pce
35001039939	25-20	61	28	21	11	80	10	pce
35001039940	32-25	69	28	28	13	80	10	pce

Uponor S-Press PLUS

Uponor S-Press reducer PPSU


- Fast installation with easy bevel and without calibration
- Colour code



Item no.	Dimension	l mm	l1 mm	l2 mm	z1 mm	Qty 2	Qty 1	UOM
35001039941	40-25	80	39	28	12	960	5	pce
35001039942	40-32	80	39	28	13	960	5	pce
35001039943	50-32	80	39	28	13	1152	3	pce
35001046406	50-40	91	39	39	13	576	3	pce
35001032883	63-40	115	61	37	17	384	1	pce
35001032884	63-50	115	61	37	17	384	1	pce
35001032885	75-50	115	61	37	17	384	1	pce
35001032886	75-63	137	61	59	17	384	1	pce

Uponor S-Press PLUS tee PPSU


- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour code



Item no.	Dimension	l1 mm	l2 mm	l3 mm	z1 mm	z2 mm	z3 mm	Qty 2	Qty 1	UOM
35001039944	16-16-16	33	33	33	13	13	13	80	10	pce
35001039945	20-20-20	37	37	37	16	16	16	80	10	pce
35001039946	25-25-25	48	48	48	19	19	19	20	5	pce
35001039947	32-32-32	51	51	51	23	23	23	20	5	pce

Uponor S-Press composite tee PPSU

- Fast installation with easy bevel and without calibration
- Colour code




Item no.	Dimension	l1 mm	l2 mm	l3 mm	z1 mm	z2 mm	z3 mm	Qty 2	Qty 1	UOM
35001046390	40-40-40	68	68	68	29	29	29	720	5	pce
35001046391	50-50-50	73	73	73	33	33	33	288	3	pce
35001032887	63-63-63	101	101	101	42	40	42	150	1	pce
35001032888	75-75-75	108	107	108	47	47	47	150	1	pce

Uponor S-Press PLUS

Uponor S-Press PLUS tee red. PPSU


- Fixed stainless steel sleeve
- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour code



Item no.	Dimension	L1 mm	L2 mm	L3 mm	Z1 mm	Z2 mm	Z3 mm	Qty 2	Qty 1	UOM
35001039948	16-20-16	35	35	35	15	13	15	80	10	pce
35001039949	20-16-16	37	36	36	16	16	16	80	10	pce
35001039950	20-16-20	37	36	37	16	16	16	80	10	pce
35001039951	20-20-16	37	37	36	16	16	16	80	10	pce
35001039952	20-25-20	41	48	41	19	19	19	80	10	pce
35001039953	25-16-16	48	39	39	19	19	19	80	10	pce
35001039954	25-16-20	48	39	41	19	19	19	80	10	pce
35001039955	25-16-25	48	39	48	19	19	19	80	10	pce
35001039956	25-20-20	48	41	41	19	19	19	80	10	pce
35001039957	25-20-25	48	41	48	19	19	19	80	10	pce
35001039958	32-16-32	51	43	51	23	23	23	20	5	pce
35001039959	32-20-32	51	44	51	23	23	23	20	5	pce
35001039960	32-25-25	51	51	51	23	23	23	20	5	pce
35001039961	32-25-32	51	51	51	23	23	23	20	5	pce

Uponor S-Press tee red. PPSU


- Fast installation with easy bevel and without calibration
- Colour code



Item no.	Dimension	L1 mm	L2 mm	L3 mm	Z1 mm	Z2 mm	Z3 mm	Qty 2	Qty 1	UOM
35001039962	40-20-40	68	49	68	29	28	29	960	5	pce
35001039963	40-25-32	68	56	56	29	28	28	960	5	pce
35001039964	40-25-40	68	56	68	29	28	29	720	5	pce
35001039965	40-32-32	68	56	56	29	28	28	960	5	pce
35001039966	40-32-40	68	56	68	29	28	29	720	5	pce
35001039967	50-25-40	73	61	73	34	33	34	432	3	pce
35001039968	50-25-50	73	61	73	34	33	34	432	3	pce
35001039969	50-32-50	73	61	73	34	33	34	432	3	pce

Uponor S-Press composite tee reducer PPSU

- Fast installation with easy bevel and without calibration
- Colour code



Item no.	Dimension	L1 mm	L2 mm	L3 mm	Z1 mm	Z2 mm	Z3 mm	Qty 2	Qty 1	UOM
35001046400	50-40-50	73	73	73	33	33	33	288	3	pce
35001032889	63-25-63	101	68	101	40	39	40	150	1	pce
35001032890	63-32-63	101	68	101	40	39	40	150	1	pce
35001032891	63-40-63	101	79	101	40	40	40	150	1	pce
35001032892	75-32-75	108	74	108	47	45	47	150	1	pce
35001032893	75-40-75	108	86	108	47	44	47	150	1	pce
35001032894	75-50-75	108	86	108	47	49	47	150	1	pce

Uponor S-Press PLUS


Uponor S-Press PLUS

Specification

- made of tin-plated DR brass

Uponor S-Press PLUS adapter male thread


- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access



Item no.	Dimension	L mm	L1 mm	L2 mm	R inch	z1 mm	Qty 2	Qty 1	UOM
35001070502	16-R $\frac{1}{2}$ "MT	44	14	20	$\frac{1}{2}$	10	80	20	pce
35001070503	16-R $\frac{3}{4}$ "MT	46	16	20	$\frac{3}{4}$	11	120	15	pce
35001070504	20-R $\frac{1}{2}$ "MT	45	14	21	$\frac{1}{2}$	10	80	20	pce
35001070505	20-R $\frac{3}{4}$ "MT	48	15	21	$\frac{3}{4}$	11	80	10	pce
35001070506	20-R1"MT	54	17	21	1	16	80	10	pce
35001070507	25-R $\frac{3}{4}$ "MT	55	15	28	$\frac{3}{4}$	11	80	10	pce
35001070508	25-R1"MT	62	18	28	1	16	40	5	pce
35001070509	32-R1"MT	62	17	28	1	16	40	5	pce
35001070510	32-R1 $\frac{1}{4}$ "MT	66	19	28	1 $\frac{1}{4}$	19	20	5	pce

Uponor S-Press adapter male thread

- Made of tin-plated brass
- Fast installation with easy bevel and without calibration
- Colour code




Item no.	Dimension	L mm	L1 mm	L2 mm	R inch	z1 mm	d mm	Qty 2	Qty 1	UOM
35001046901	40-R1 $\frac{1}{4}$ "MT	78	20	38	1 $\frac{1}{4}$	20		960	5	pce
35001046902	40-R1 $\frac{1}{2}$ "MT	80	20	38	1 $\frac{1}{2}$	22	40	960	5	pce
35001046905	50-R1 $\frac{1}{2}$ "MT	80	20	38	1 $\frac{1}{2}$	22	50	1152	3	pce
35001046906	50-R2"MT	84	24	38	2	22	50	576	3	pce
35001032895	63-R2"MT	111	28	61	2	22		336	1	pce
35001032896	75-R2 $\frac{1}{2}$ "MT	110	27	61	2 $\frac{1}{2}$	22		336	1	pce

Uponor S-Press PLUS

Uponor S-Press PLUS adapt. female thread


- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access



Item no.	Dimension	L	L1	L2	Rp	z1		Qty 2	Qty 1	UOM
35001070515	16-Rp $\frac{1}{2}$ "FT	47	15	20	$\frac{1}{2}$	12		80	20	pce
35001070516	20-Rp $\frac{1}{2}$ "FT	47	15	21	$\frac{1}{2}$	10		120	15	pce
35001070517	20-Rp $\frac{3}{4}$ "FT	51	16	21	$\frac{3}{4}$	14		80	10	pce
35001070518	20-Rp1"FT	52	19	21	1	12		80	20	pce
35001070519	25-Rp $\frac{3}{4}$ "FT	56	17	28	$\frac{3}{4}$	11		40	5	pce
35001070520	25-Rp1"FT	59	19	28	1	12		40	5	pce
35001070521	32-Rp1"FT	58	20	28	1	10		40	5	pce
35001070522	32-Rp1 $\frac{1}{4}$ "FT	62	21	28	1 $\frac{1}{4}$	13		20	5	pce

Uponor S-Press adapter female thread

- Made of tin-plated brass
- Fast installation with easy bevel and without calibration
- Colour code




Item no.	Dimension	L	L1	L2	Rp	z1		Qty 2	Qty 1	UOM
35001046903	40-Rp1 $\frac{1}{4}$ "FT	73	21	38	1 $\frac{1}{4}$	14		960	5	pce
35001046904	40-Rp1 $\frac{1}{2}$ "FT	77	21	38	1 $\frac{1}{2}$	18		960	5	pce
35001046907	50-Rp1 $\frac{1}{2}$ "FT	73	21	38	1 $\frac{1}{2}$	14		1152	3	pce

Uponor S-Press PLUS

Uponor S-Press PLUS elbow


- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access



Item no.	Dimension	l1 mm	l2 mm	z1 mm	z2 mm	Qty 2	Qty 1	UOM
35001070523	16-16	34	34	14	14	80	20	pce
35001070524	20-20	37	37	16	16	80	10	pce
35001070525	25-25	47	47	19	19	40	5	pce
35001070526	32-32	51	51	23	23	20	5	pce

Uponor S-Press elbow


- Made of tin-plated brass
- Fast installation with easy bevel and without calibration
- Colour code



Item no.	Dimension	l1 mm	l2 mm	z1 mm	z2 mm	Qty 2	Qty 1	UOM
35001046908	40-40	72	72	34	34	600	5	pce
35001046911	50-50	79	79	41	41	240	3	pce

Uponor S-Press PLUS bend

- Made of casted DR brass
- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- extra low pressure loss




Item no.	Dimension	l1 mm	l2 mm	z1 mm	z2 mm	Qty 2	Qty 1	UOM
35001070527	16-16	37	37	17	17	80	10	pce
35001070528	20-20	40	40	19	19	80	10	pce
35001070529	25-25	50	50	22	22	40	5	pce
35001070530	32-32	56	56	28	28	20	5	pce

Uponor S-Press PLUS

Uponor S-Press PLUS elbow male thread


- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access



Item no.	Dimension	l1 mm	l2 mm	R inch	z1 mm	z2 mm	Qty 2	Qty 1	UOM
35001070532	16-R $\frac{1}{2}$ "MT	30	37	$\frac{1}{2}$	15	17	80	20	pce
35001070533	20-R $\frac{1}{2}$ "MT	32	41	$\frac{1}{2}$	15	19	80	10	pce
35001070534	20-R $\frac{3}{4}$ "MT	34	41	$\frac{3}{4}$	18	19	80	10	pce
35001070535	25-R $\frac{3}{4}$ "MT	36	48	$\frac{3}{4}$	20	19	40	5	pce
35001070536	25-R1"MT	43	51	1	22	23	40	5	pce
35001070537	32-R1"MT	43	51	1	22	23	20	5	pce

Uponor S-Press elbow adapter male thread


- Made of tin-plated brass
- Fast installation with easy bevel and without calibration
- Colour code



Item no.	Dimension	l1 mm	l2 mm	R inch	z1 mm	z2 mm	Qty 2	Qty 1	UOM
35001046909	40-R1 $\frac{1}{4}$ "MT	49	72	1 $\frac{1}{4}$	30	34	500	5	pce

Uponor S-Press PLUS elbow female thread

- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access




Item no.	Dimension	l1 mm	l2 mm	Rp inch	z1 mm	z2 mm	Qty 2	Qty 1	UOM
35001070539	16-Rp $\frac{1}{2}$ "FT	33	38	$\frac{1}{2}$	18	18	80	10	pce
35001070540	20-Rp $\frac{1}{2}$ "FT	36	41	$\frac{1}{2}$	21	19	80	10	pce
35001070541	20-Rp $\frac{3}{4}$ "FT	36	43	$\frac{3}{4}$	19	22	40	10	pce
35001070542	25-Rp $\frac{3}{4}$ "FT	40	50	$\frac{3}{4}$	23	22	20	5	pce
35001070543	25-Rp1"FT	45	54	1	25	26	20	5	pce
35001070544	32-Rp1"FT	49	54	1	30	26	20	5	pce

Uponor S-Press PLUS

Uponor S-Press elbow adap. female thread


- Made of tin-plated brass
- Fast installation with easy bevel and without calibration
- Colour code



Item no.	Dimension	l1 mm	l2 mm	Rp inch	z1 mm	z2 mm	Qty 2	Qty 1	UOM
35001046910	40-Rp1 ½"FT	59	75	1 ½	38	37	500	5	pce
35001046912	50-Rp1 ½"FT	59	79	1 ½	38	41	300	3	pce

Uponor S-Press PLUS elbow 45


- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access



Item no.	Dimension	l1 mm	l2 mm	z1 mm	z2 mm	Qty 2	Qty 1	UOM
35001070545	25-25	46	46	18	18	20	5	pce
35001070546	32-32	49	49	23	23	20	5	pce

Uponor S-Press elbow 45

- Made of tin-plated brass
- Fast installation with easy bevel and without calibration
- Colour code




Item no.	Dimension	l1 mm	l2 mm	z1 mm	z2 mm	Qty 2	Qty 1	UOM
35001046913	40-40	59	59	21	21	500	5	pce
35001046914	50-50	63	63	25	25	300	3	pce

Uponor S-Press PLUS

Uponor S-Press PLUS coupling


- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access



Item no.	Dimension	l mm	l1 mm	l2 mm	z1 mm	Qty 2	Qty 1	UOM
35001070547	16-16	51	20	20	12	80	20	pce
35001070548	20-20	54	21	21	12	80	10	pce
35001070549	25-25	68	28	28	12	80	10	pce
35001070550	32-32	68	28	28	12	40	5	pce

Uponor S-Press coupling


- Made of tin-plated brass
- Fast installation with easy bevel and without calibration
- Colour code



Item no.	Dimension	l mm	l1 mm	l2 mm	z1 mm	Qty 2	Qty 1	UOM
35001046932	40-40	88	38	38	12	960	5	pce
35001046935	50-50	88	38	38	12	576	3	pce

Uponor S-Press PLUS reducer

- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access




Item no.	Dimension	l mm	l1 mm	l2 mm	z1 mm	Qty 2	Qty 1	UOM
35001070552	20-16	53	21	20	12	80	20	pce
35001070553	25-16	60	28	20	12	80	10	pce
35001070554	25-20	61	28	21	12	80	10	pce
35001070555	32-20	61	28	21	12	80	10	pce
35001070556	32-25	68	28	28	12	80	10	pce

Uponor S-Press PLUS

Uponor S-Press reducer


- Made of tin-plated brass



Item no.	Dimension	l	l1	l2	z1		Qty 2	Qty 1	UOM
35001046934	50-40	89	38	38	14		576	3	pce

Uponor S-Press PLUS tee


- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access



Item no.	Dimension	l1	l2	l3	z1	z2	z3		Qty 2	Qty 1	UOM
35001070560	16-16-16	34	34	34	14	14	14		80	10	pce
35001070561	20-20-20	37	37	37	16	16	16		80	10	pce
35001070562	25-25-25	47	47	47	19	19	19		20	5	pce
35001070563	32-32-32	51	51	51	23	23	23		20	5	pce

Uponor S-Press tee

- Made of tin-plated brass
- Fast installation with easy bevel and without calibration
- Colour code




Item no.	Dimension	l1	l2	l3	z1	z2	z3		Qty 2	Qty 1	UOM
35001046921	40-40-40	72	72	72	34	34	34		400	5	pce
35001046928	50-50-50	79	79	79	41	41	41		300	3	pce

Uponor S-Press PLUS

Uponor S-Press PLUS tee reducer

- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access




Item no.	Dimension	l1 mm	l2 mm	l3 mm	z1 mm	z2 mm	z3 mm	Qty 2	Qty 1	UOM
35001070566	16-20-16	36	37	36	16	16	16	80	10	pce
35001070567	20-16-16	35	36	34	14	16	14	40	10	pce
35001070568	20-16-20	35	36	35	14	16	14	80	20	pce
35001070569	20-20-16	37	37	36	16	16	16	80	20	pce
35001070570	20-25-16	40	47	38	19	19	19	40	10	pce
35001070571	20-25-20	40	47	40	19	19	19	40	10	pce
35001070572	25-16-16	44	38	36	16	19	17	40	5	pce
35001070573	25-16-20	44	38	38	16	19	17	40	5	pce
35001070574	25-16-25	42	38	42	14	19	14	20	5	pce
35001070575	25-20-16	44	40	36	16	19	17	40	5	pce
35001070576	25-20-20	44	40	38	16	19	17	40	5	pce
35001070577	25-20-25	44	40	44	16	19	16	20	5	pce
35001070578	25-25-16	47	47	38	19	19	19	20	5	pce
35001070579	25-32-25	50	48	50	22	20	22	20	5	pce
35001070580	32-16-32	43	42	43	15	22	15	20	5	pce
35001070581	32-20-32	45	43	45	17	22	17	20	5	pce
35001070582	32-25-25	48	50	48	20	22	20	20	5	pce
35001070583	32-25-32	48	50	48	20	22	20	20	5	pce

Uponor S-Press PLUS

Uponor S-Press PLUS tee male thread


- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access



Item no.	Dimension	L1 mm	L2 mm	L3 mm	R inch	z1 mm	z2 mm	z3 mm	Qty 2	Qty 1	UOM
35001070592	16-R $\frac{1}{2}$ "MT-16	38	30	38	$\frac{1}{2}$	18	15	18	40	10	pce
35001070593	25-R $\frac{3}{4}$ "MT-25	48	36	48	$\frac{3}{4}$	19	21	19	20	5	pce
35001070594	32-R $\frac{3}{4}$ "MT-32	48	40	48	$\frac{3}{4}$	19	25	19	20	5	pce

Uponor S-Press PLUS tee female thread


- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access



Item no.	Dimension	L1 mm	L2 mm	L3 mm	Rp inch	z1 mm	z2 mm	z3 mm	Qty 2	Qty 1	UOM
35001070595	16-Rp $\frac{1}{2}$ "FT-16	38	33	38	$\frac{1}{2}$	18	18	18	40	10	pce
35001070596	20-Rp $\frac{1}{2}$ "FT-20	40	35	40	$\frac{1}{2}$	19	20	19	60	15	pce
35001070597	20-Rp $\frac{3}{4}$ "FT-20	43	37	43	$\frac{3}{4}$	22	20	22	40	10	pce
35001070598	25-Rp $\frac{1}{2}$ "FT-25	48	37	48	$\frac{1}{2}$	19	22	19	20	5	pce
35001070599	25-Rp $\frac{3}{4}$ "FT-25	50	40	50	$\frac{3}{4}$	22	23	22	20	5	pce
35001070600	32-Rp $\frac{1}{2}$ "FT-32	47	40	47	$\frac{1}{2}$	18	25	18	20	5	pce
35001070601	32-Rp $\frac{3}{4}$ "FT-32	51	44	51	$\frac{3}{4}$	23	27	23	20	5	pce

Uponor S-Press tee adapter female thread

- Made of tin-plated brass
- Fast installation with easy bevel and without calibration
- Colour code




Item no.	Dimension	L1 mm	L2 mm	L3 mm	Rp inch	z1 mm	z2 mm	z3 mm	Qty 2	Qty 1	UOM
35001046922	40-Rp $\frac{1}{2}$ "FT-40	69	47	69	$\frac{1}{2}$	31	30	31	500	5	pce
35001046923	40-Rp $\frac{3}{4}$ "FT-40	64	47	64	$\frac{3}{4}$	26	31	26	400	5	pce
35001046929	50-Rp1"FT-50	72	56	72	1	34	37	34	240	3	pce

Uponor S-Press PLUS

Uponor S-Press PLUS adapter swivel nut


- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Releasable screw connector for connection to on-wall fittings, filters and shut-off valves
- Thread acc. to EN ISO 228-1.



Item no.	Dimension	I	I1	I2	G	z1	Qty 2	Qty 1	UOM
35001070602	16-G $\frac{1}{2}$ "SN	53	8	20	$\frac{1}{2}$	25	30	1	pce
35001070603	16-G $\frac{3}{4}$ "SN	44	8	20	$\frac{3}{4}$	17	20	1	pce
35001070604	20-G $\frac{1}{2}$ "SN	59	8	21	$\frac{1}{2}$	30	20	1	pce
35001070605	20-G $\frac{3}{4}$ "SN	46	8	21	$\frac{3}{4}$	17	20	1	pce
35001070606	25-G $\frac{3}{4}$ "SN	64	8	28	$\frac{3}{4}$	28	15	1	pce
35001070607	25-G1"SN	57	9	28	1	20	15	1	pce
35001070610	32-G1 $\frac{1}{4}$ "SN	59	9	28	1 $\frac{1}{4}$	22	10	1	pce

Uponor S-Press adapter swivel nut

- Made of tin-plated brass
- Fast installation with easy bevel and without calibration
- Colour code
- Releasable screw connector for connection to on-wall fittings, filters and shut-off valves
- Thread acc. to EN ISO 228-1.




Item no.	Dimension	I	I1	I2	G	z1	Qty 2	Qty 1	UOM
35001046937	40-G1 $\frac{1}{2}$ "SN	77	10	38	1 $\frac{1}{2}$	30	960	5	pce
35001046939	50-G2"SN	82	12	38	2	32	576	3	pce

Uponor S-Press PLUS

Uponor S-Press PLUS tap elbow M


- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- for on wall installation or attachment with rotation protection to the Uponor Smart Aqua mounting angles and plates.



Item no.	Dimension	l1 mm	l2 mm	l3 mm	Rp inch	z1 mm	z3 mm	k mm	Qty 2	Qty 1	UOM
35001070638	16-Rp $\frac{3}{4}$ "FT	41	17	22	$\frac{3}{8}$	21	11	40	40	10	pce
35001070639	16-Rp $\frac{1}{2}$ "FT	41	17	22	$\frac{1}{2}$	21	7	40	40	10	pce
35001070640	20-Rp $\frac{1}{2}$ "FT	42	17	23	$\frac{1}{2}$	21	8	40	40	10	pce
35001070641	20-Rp $\frac{3}{4}$ "FT	45	17	23	$\frac{3}{4}$	24	7	40	20	5	pce
35001070642	25-Rp $\frac{3}{4}$ "FT	54	27	25	$\frac{3}{4}$	26	8	40	20	5	pce

Uponor S-Press PLUS tap elbow L


- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- for on wall installation or attachment with rotation protection to the Uponor Smart Aqua mounting angles and plates.



Item no.	Dimension	l1 mm	l2 mm	l3 mm	Rp inch	z1 mm	z3 mm	k mm	Qty 2	Qty 1	UOM
35001070644	16-Rp $\frac{1}{2}$ "FT	42	20	30	$\frac{1}{2}$	22	15	40	40	10	pce
35001070645	20-Rp $\frac{1}{2}$ "FT	46	20	30	$\frac{1}{2}$	25	15	40	40	10	pce

Uponor S-Press PLUS sound + leak protect

- Set is suitable for two Uponor S-Press PLUS tap elbows 16-Rp $\frac{1}{2}$ "FT or 20-Rp $\frac{1}{2}$ "FT
- Pins and screws M6 x 16 included
- Made of EPP
- Sound protection acc., VDI 4100
- Drainage function conform to DIN 18534




Item no.	Dimension	l1 mm	l2 mm	z1 mm	Qty 2	Qty 1	UOM
35001121193	16-20	20	74	3	192	1	set
35001121194	16-20	23	71	3	192	1	set

Uponor S-Press PLUS

Uponor S-Press PLUS U-tap elbow


- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- For on wall installation or attachment with rotation protection to the Uponor Smart Aqua mounting angles and plates.



Item no.	Dimension	l1	l2	l3	l4	Rp	z1	z2	z3	z4	b	k	Qty 2	Qty 1	UOM
35001070629	16-Rp½"FT-16	56	56	20	23	½	36	36	8		45	40	20	5	pce
35001070630	20-Rp½"FT-20	57	57	20	23	½	36	36	8		45	40	960	5	pce
35001070631	20-Rp½"FT-16	57	56	20	23	½	36	36	8		45	40	960	5	pce
35001070632	16-Rp½"FT-20	56	57	20	23	½	36	36	8		45	40	960	5	pce
35001070633	25-Rp½"FT-25	64	64	27	24	½	36	36	9		60	40	576	3	pce
35001070634	25-Rp½"FT-20	64	57	27	24	½	36	36	9		60	40	576	3	pce

Uponor S-Press PLUS tap elbow twin 90 long


- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- For on wall installation or attachment with rotation protection to the Uponor Smart Aqua mounting angles and plates.
- Thread acc. to EN ISO 228-1



Item no.	Dimension	l1	l2	l3	l4	Rp	z1	z2	z3	k	k1	Qty 2	Qty 1	UOM
35001070648	16-Rp½"FT-16	44	45	30	20	½	24	25	15	20	20	40	10	pce
35001070649	20-Rp½"FT-20	46	46	30	20	½	24	25	15	20	20	40	10	pce

Uponor S-Press PLUS stop end

- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access




Item no.	Dimension	l	l1	l2	Qty 2	Qty 1	UOM
35001070621	16	27	7	20	160	40	pce
35001070622	20	28	7	21	7680	20	pce
35001070623	25	35	7	28	3840	10	pce
35001070624	32	35	7	28	1920	5	pce

Uponor S-Press PLUS

Uponor S-Press PLUS adapter wall penetr.


- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- For lead-through through walls.
- Dimensions of attachment plate (H x W x D) 100 x 50 x 2 mm.
- Hole circle diameter 33 mm.



Item no.	Dimension	l	l1	l2	l3	s	Rp	z1	k	Qty 2	Qty 1	UOM
35001070652	16-G½"FT	51	17	20	100	2	½	14	40	5	1	pce

Uponor S-Press PLUS adapter

- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- With soldered copper pipe according to EN 1057 (half hard / R250)
- complete tin-plated
- Attention:
The copper side is for press connections and suitable compression fittings only.




Item no.	Dimension	l	l1	l2	z1	Qty 2	Qty 1	UOM
35001070615	16-15CU	76	40	20	16	160	20	pce
35001070707	20-15CU	76	39	21	16	3840	10	pce

Uponor S-Press PLUS


Uponor S-Press PLUS mounting plate

- Made of galvanized steel.
- For the installation of Uponor Smart Aqua tap elbows
- Positioning of the connections in the given raster
- Plastic pins and loss protected screws M6x12 acc. DIN 965 included
- With holes and slots for easy attachment



NEW

Item no.	Dimension	l mm	s mm	h mm	k mm	k1 mm	w mm	Qty 2	Qty 1	UOM
35001121197	80/150mm	265	3	9	80	150	35	5	1	pce




Uponor S-Press PLUS mounting angle

- Made of galvanized steel.
- For the installation of Uponor Smart Aqua tap elbows
- Positioning of the connections in the given raster
- Plastic pins and loss protected screws M6x12 acc. DIN 965 included
- With holes and slots for easy attachment



NEW

Item no.	Dimension	l mm	s mm	b mm	h mm	k mm	k1 mm	w mm	Qty 2	Qty 1	UOM
35001121195	80/150mm	440	3	266	57	80	150	35	5	1	pce




Uponor Smart Aqua single mounting angle

- Made of galvanized steel.
- For the installation of Uponor Smart Aqua tap elbows.
- Positioning of the connections in the given raster.
- Screws M6x12 acc. DIN 965 included. With holes and slots for easy attachment




Item no.	Dimension	l mm	b mm	h mm	Qty 2	Qty 1	UOM
35001057843		144	82	46	5	1	pce



Uponor S-Press PLUS

Uponor Smart Aqua mounting rack


- Made of galvanized steel.
- For the installation of Uponor Smart Aqua tap elbows.
- Positioning of the connections in the given raster.
- Screws M6x12 acc. DIN 965 included. With holes and slots for easy attachment



Item no.	Dimension	l mm	k mm	Qty 2	Qty 1	UOM
35001057844	2m	2000	75	10	1	pce

Uponor Smart Aqua 10 pins+20 screws

- Pins and screws for mounting plates, angles and tracks.




Item no.	Dimension	l mm	do1 mm	do2 mm	c/c1 mm	Qty 1	UOM
35001057847*		17	4	10	10	1	set



Riser System

Uponor RS



Uponor RS is a unique system that follows a modular design principle for riser systems and other distribution lines. Just 40 system components enable hundreds of variations, making the system highly adaptable.

Your benefits

- Innovative plug connection between body and adapter
- Fast and flexible: tool-free assembly, many variations
- More efficient stock management
- Re-adjustment possible until final installation
- Colour coding 16 -110mm for easy dimension selection



Specification

- with fixed press sleeve
- stop ring
- colour code
- Test safety

Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

if not different mentioned:

- Male and female threads acc.to EN 10226-1.

Certification

- WaterMark Certified to AS 4176.2:2010 Multilayer pipes for pressure application Part 2: Multilayer piping Systems for hot and cold water plumbing applications- Pipes (ISO 21003-2:2008, MOD)
- AS 4176.3:2010 Multilayer pipes for pressure applications Part 3: Multilayer piping systems for hot and cold water plumbing applications—Fittings (ISO 21003-3:2008, MOD)




Uponor RS coupling

- Made of tin-plated brass
- Base part for all RS2 or RS3 inserts including 2 lock pins.




Item no.	Dimension	l mm	Qty 2	Qty 1	UOM
35001029144	RS2-RS2	58	480	1	pce
35001029145	RS3-RS3	58	480	1	pce



Uponor RS

Uponor RS elbow


- Made of tin-plated brass
- Base part for all RS2 or RS3 inserts including 2 lock pins.



Item no.	Dimension	I1 mm	I2 mm	Qty 2	Qty 1	UOM
35001029138	RS2-RS2	51	51	336	1	pce
35001029139	RS3-RS3	68	68	240	1	pce

Uponor RS elbow 45


- Made of tin-plated brass
- Base part for all RS2 or RS3 inserts including 2 lock pins.



Item no.	Dimension	I1 mm	I2 mm	Qty 2	Qty 1	UOM
35001029140	RS2-RS2	51	51	336	1	pce
35001029141	RS3-RS3	68	68	175	1	pce

Uponor RS tee

- Made of tin-plated brass
- Base part for all RS2 or RS3 inserts including 3 lock pins.




Item no.	Dimension	I1 mm	I2 mm	I3 mm	Qty 2	Qty 1	UOM
35001029142	RS2-RS2-RS2	51	51	51	336	1	pce
35001029143	RS3-RS3-RS3	68	68	68	175	1	pce

Uponor RS

Uponor RS reducer


- Made of tin-plated brass
- Reducer from RS3 to RS2 including 1 lock pin.



Item no.	Dimension	l mm	l1 mm	l2 mm	z1 mm	Qty 2	Qty 1	UOM
35001029146	RS3-RS2	47	20	19	8	480	1	pce

Uponor RS spacer


- Made of tin plated-brass
- Spacer to connect RS base parts of equal dimensions.



Item no.	Dimension	l mm	l1 mm	l2 mm	z1 mm	Qty 2	Qty 1	UOM
35001046750	RS2-RS2 l=5mm	45	20	20	5	480	1	pce
35001046751*	RS3-RS3 l=5mm	45	20	20	5	240	1	pce

Uponor RS spacer

- Made of tin-plated brass
- Spacer to connect RS base parts of equal dimensions e.g to create T-manifold or shift in distribution lines.




Item no.	Dimension	l mm	l1 mm	l2 mm	l3 mm	z1 mm	Qty 2	Qty 1	UOM
35001046477*	RS2-RS2 l=130mm	170	20	20	30	130	240	1	pce
35001046478*	RS3-RS3 l=210mm	250	20	20	30	210	96	1	pce

Uponor RS

Uponor RS adapter S-Press


- Made of tin-plated brass
- Fits to all RS2 base parts.



Item no.	Dimension	l mm	l1 mm	l2 mm	z1 mm	Qty 2	Qty 1	UOM
35001059397	16-RS2	61	20	21	20	480	1	pce

Uponor RS adapter S-Press PLUS


- tin plated
- made of DR material
- press without bevel



Item no.	Dimension	l mm	l1 mm	l2 mm	z1 mm	Qty 2	Qty 1	UOM
35001095818	20-RS2	61	20	21	20	378	1	pce
35001095819	25-RS2	75	20	28	27	378	1	pce
35001095820	32-RS2	75	20	28	27	378	1	pce

Uponor RS adapter S-Press

- Made of tin-plated brass
- Fits to all RS2 or RS3 base parts.




Item no.	Dimension	l mm	l1 mm	l2 mm	z1 mm	Qty 2	Qty 1	UOM
35001046940	40-RS2	65	20	38	7	480	1	pce
35001046941	50-RS2	65	20	38	7	480	1	pce
35001029125	63-RS2	88	20	61	7	400	1	pce
35001029126	75-RS2	88	20	61	7	400	1	pce
35001029127	90-RS3	93	20	62	11	240	1	pce
35001029128	110-RS3	93	20	62	11	240	1	pce

Uponor RS

Uponor RS adapter male thread


- Made of tin-plated brass
- Fits to all RS2 or RS3 base parts



Item no.	Dimension	l mm	l1 mm	l2 mm	R inch	z1 mm	Qty 2	Qty 1	UOM
35001059402	R1 ½"MT-RS2	62	20	24	1 ½	18	480	1	pce
35001029131	R2"MT-RS2	66	20	23	2	23	480	1	pce
35001029132	R2 ½"MT-RS2	63	20	27	2 ½	16	480	1	pce
35001029133	R3"MT-RS3	73	20	30	3	23	240	1	pce

Uponor RS adapter female thread


- Made of tin-plated brass.
- its to all RS2 or RS3 base parts



Item no.	Dimension	l mm	l1 mm	l2 mm	Rp inch	z1 mm	Qty 2	Qty 1	UOM
35001059403	Rp1 ½"FT-RS2	42	20	15	½	7	480	1	pce
35001029134	Rp1"FT-RS2	45	20	19	1	6	480	1	pce
35001029135	Rp2"FT-RS2	54	20	26	2	8	480	1	pce
35001029136	Rp2 ½"FT-RS2	63	20	30	2 ½	12	480	1	pce
35001059404	Rp1 ½"FT-RS3	43	20	15	½	8	336	1	pce
35001029137	Rp3"FT-RS3	65	20	33	3	12	240	1	pce

Uponor RS flange adapter

- Made of tin-plated brass
- Fits to all RS2 or RS3 base parts
- Flange PN6/PN16 acc. to EN 1092-3
- Bolt circle with 4/8 holes.



Item no.	Dimension	l mm	di mm	do mm	z1 mm	k mm	p bar	Qty 2	Qty 1	UOM
35001059399*	RS2-DN65 (PN16)	45	48,7	185	25	145	16	90	1	pce
35001029129*	RS3-DN80 (PN16)	45	78,1	200	25	160	16	90	1	pce
35001029130	RS3-DN100 (PN16)	44	78,1	220	24	180	16	90	1	pce

Uponor RS lock pin

- made of plastic
- to lock the RS insert to the RS base part.



Item no.	Dimension	colour	Qty 2	Qty 1	UOM
35001042921	RS2 black	black	5000	10	pce
35001042922	RS3 grey	grey		10	pce



MLCP Tools

Uponor Cutting & Preperation

Uponor Multi pipe cutting tool

- outside diameters 32-40 mm



Item no.	Dimension	Qty 2	Qty 1	UOM
35001089677	32-40	12	1	pce
35001089779	32-40 blade	50	1	pce

Uponor Multi pipe cutting tool

- outside diameters 25-63 mm



Item no.	Dimension	Qty 2	Qty 1	UOM
35001089675	25-63	12	1	pce
35001089777	25-63 blade (wheel)	50	1	pce

Uponor Multi pipe cutting tool

- outside diameters 50-125 mm



Item no.	Dimension	Qty 2	Qty 1	UOM
35001089676	50-125	8	1	pce
35001089778	50-125 blade (wheel)	50	1	pce

Uponor Cutting & Preparation

Uponor MLC pipe cutting + deburring tool



Item no.	Dimension	Qty 2	Qty 1	UOM
35001014334	63-110	32	1	pce
35001014320	63-110 blade (wheel)	100	1	pce

Uponor MLC bevelling tool

- For bevelling the Uponor Uni Pipe PLUS and MLC pipes.
- Supplied with manual toggle. Without manual toggle to be used as attachment for self-driving screw with tapping screw thread.



Item no.	Dimension	Qty 2	Qty 1	UOM
35001006830	16	50	1	pce
35001015749	20	1200	1	pce
35001015756	25	960	1	pce
35001015762	32	900	1	pce

Uponor MLC bevelling tool



Item no.	Dimension	Qty 2	Qty 1	UOM
35001006638	40	600	1	pce
35001015808	50	600	1	pce
35001014339	63	600	1	pce
35001014344	75	600	1	pce

Uponor MLC bevelling tool

- For bevelling the Uponor Uni Pipe PLUS and MLC pipes.



Item no.	Dimension	Qty 2	Qty 1	UOM
35001015739	16/20/25	60	1	pce

Uponor MLC deburring tool universal



Item no.	Dimension	Qty 2	Qty 1	UOM
35001060167		50	1	pce

Uponor Cutting & Preperation

Uponor MLC bending spring inside

- bending spring for Uponor Uni Pipe PLUS and MLC pipes.



Item no.	Dimension	Qty 2	Qty 1	UOM
35001013729	16	100	1	pce
35001013734	20	75	1	pce
35001013737	25	50	1	pce
35001013739	32	40	1	pce

Uponor MLC bending spring outside

- bending spring for Uponor Uni Pipe PLUS and MLC pipes.



Item no.	Dimension	Qty 2	Qty 1	UOM
35001006639*	14	550	1	pce
35001006640	16	55	1	pce
35001013792	20	45	1	pce
35001013794	25	45	1	pce

Uponor Uni Pipe PLUS bending tool

- producing evenly formed bends in Uponor Uni Pipe PLUS pipes with outer diameters up to 32 mm.
- Delivered complete in tool case with bending segments.



Item no.	Dimension	Qty 2	Qty 1	UOM
35001071925	16-32	100	1	pce

Uponor Pressing

Uponor S-Press manual tool w/o inserts

- in conjunction with exchangeable inserts
- Supplied in case without exchangeable inserts



Item no.	Dimension	d mm	Qty 2	Qty 1	UOM
35001015764	16-20	16-20	100	1	pce

Uponor S-Press manual tool insert

- For inserting into the manual pressing tool



Item no.	Dimension	d mm	Qty 2	Qty 1	UOM
35001015777	16	16	50	1	pce
35001015780	20	20	50	1	pce

Uponor S-Press tool UP110 without jaws

- supplied in carrying case, complete with battery and charger unit
- without pressing jaws.
- Range of application up to 110 mm.

Technical specifications:

- Quick pressing due to short pressing cycle
- Crimping force: linear thrust of approx. 32 kN
- Battery capacity: High-power Makita 3.0 Ah Li-Ion battery
- Charging time: 22 min
- Weight incl. battery: without jaw 3.5 kg
- Dimensions tool: 366 x 81 x 317 mm
- Revolving/rotatable: approx. 350° rotating pressing jaw holder



Item no.	Dimension	Qty 2	Qty 1	UOM
35001083612		20	1	set

Uponor S-Press battery UP110

- Akku 18 V / 3,0 Ah, Li-Ion (54 Wh)
- Battery voltage: 18 V
- Battery capacity: 3.0 Ah
- Charging time: With SPI S-PRESS BATTERY CHARGER: 22 min
- Cell technology: Li-Ion
- Weight: 0,6 kg



Item no.	Dimension	OV V	Qty 2	Qty 1	UOM
35001083608*		18	10	1	pce

Uponor Pressing

Uponor S-Press battery charger

- Quick-charger for 18V Li-Ion batteries, 230 V
- Charging time: 1.3 Ah 15 min,
3.0 Ah 22 min
- Mains supply: 230 V AC
- Voltage range: 18 V
- Weight: 1,0 kg



Item no.	Dimension	OV V	Qty 2	Qty 1	UOM
35001083610*	Mini2, UP110	230	72	1	pce

Uponor S-Press electric tool w/o jaws UP75

Technical specifications:

- Weightl: 3.30 kg
- Nominal voltage: 230 V AC / 50 Hz
- Nominal capacity: 200 Watt
- Press power: ca. 32 kN
- Press duration: ca. 7 sec.



Item no.	Dimension	d mm	OV V	Qty 2	Qty 1	UOM
35001007082	-	110	230	20	1	pce

Uponor S-Press spare battery UP75

- for the battery powered pressing machine UP 75
- Not compatible to the Ni-Cd charger unit.



Item no.	Dimension	OV V	Qty 2	Qty 1	UOM
35001006949*		12	12	1	pce

Uponor S-Press spare charger Mini UP75

- or the re-chargeable battery of the pressing machine UP 75 and Mini KSP0



Item no.	Dimension	OV V	Qty 2	Qty 1	UOM
35001006950		230	10	1	pce

Uponor S-Press jaw UPP1

- pressing jaws for Uponor MLC press fittings



Item no.	Dimension	d mm	Qty 2	Qty 1	UOM
35001007084	16	16	216	1	pce
35001007086	20	20		1	pce
35001007087	25	25		1	pce
35001007088	32	32		1	pce

Uponor Pressing

Uponor S-Press jaw UPP1

- pressing jaws for Uponor MLC press fittings



Item no.	Dimension	d mm	Qty 2	Qty 1	UOM
35001015768	40	40	108	1	pce
35001015792	50	50	108	1	pce

Uponor S-Press base unit for chain

- Base unit for the pressing chain to press Uponor MLC press fittings 63 - 110 in conjunction with the pressing tool UP 110, UP 75 and UP 75 EL



Item no.	Dimension	d mm	Qty 1	UOM
35001046545	63-110	63-110	1	pce

Uponor S-Press chain

- pressing chain to be used together with the Base unit to press Uponor MLC press fittings 63 - 110 in conjunction with the pressing tool UP 110, UP 75 and UP 75 EL



Item no.	Dimension	d mm	Qty 2	Qty 1	UOM
35001046541	63	63	72	1	pce
35001046542	75	75	72	1	pce
35001046543*	90	90	72	1	pce
35001046544*	110	110	54	1	pce

Uponor Pressing

Uponor S-Press tool Mini2 with KSP0 jaw

- Uponor S-Press tool Mini² supplied in carrying case, complete with battery and charger unit and pressing jaws.
- Range of application up to 32 mm.

Technical specifications:

- Very quick pressing thanks to short pressing cycle of 3-4 seconds
- Crimping force: linear thrust of approx. 15 kN
- Battery capacity: High-power Makita 1.3 Ah Li-Ion battery (3.0 Ah optional)
- Charging time: 1.5 Ah 15 min. 3.0 Ah 22 min
- Weight incl. battery: without jaws 1.7 kg
- Dimensions tool: 377 x 75 x 116 mm
- Revolving/rotatable: approx. 350° rotating pressing jaw holder



Item no.	Dimension	Qty 2	Qty 1	UOM
35001083586	16/20/25/32	30	1	set

Uponor S-Press tool Mini2 with KSP0 jaw

- Uponor S-Press tool Mini² supplied in carrying case, complete with battery and charger unit and pressing jaws.
- Range of application up to 25 mm.

Technical specifications:

- Very quick pressing thanks to short pressing cycle of 3-4 seconds
- Crimping force: linear thrust of approx. 15 kN
- Battery capacity: High-power Makita 1.3 Ah Li-Ion battery (3.0 Ah optional)
- Charging time: 1.5 Ah 15 min. 3.0 Ah 22 min
- Weight incl. battery: without jaws 1.7 kg
- Dimensions tool: 377 x 75 x 116 mm
- Revolving/rotatable: approx. 350° rotating pressing jaw holder



Item no.	Dimension	Qty 2	Qty 1	UOM
35001083594	16/20/25	25	1	set

Uponor Pressing

Uponor S-Press tool Mini2 without jaws

- Uponor S-Press tool Mini² supplied in carrying case, complete with battery and charger unit.
- Range of application up to 32 mm.

Technical specifications:

- Very quick pressing thanks to short pressing cycle of 3-4 seconds
- Crimping force: linear thrust of approx. 15 kN
- Battery capacity: High-power Makita 1.5 Ah Li-Ion battery (3.0 Ah optional)
- Charging time: 1.5 Ah 15 min. 3.0 Ah 22 min
- Weight incl. battery: without jaws 1.7 kg
- Dimensions tool: 377 x 75 x 116 mm
- Revolving/rotatable: approx. 350° rotating pressing jaw holder



Item no.	Dimension	Qty 1	UOM
35001085388		1	pce

Uponor S-Press tool Mini2

- Uponor SPI S-Press tool Mini² without carrying case, without battery and charger unit and without pressing jaws.



Item no.	Dimension	Qty 1	UOM
13500087260		1	pce

Uponor S-Press battery Mini2

- Battery 18 V / 1.5 Ah, Li-Ion (27 Wh)
- Battery voltage: 18 V
- Battery capacity: 1.5 Ah
- Charging time: With SPI S-Press Battery Charger: 15 min
- Cell technology: Li-Ion
- Weight: 0,4 kg



Item no.	Dimension	OV V	Qty 2	Qty 1	UOM
35001083605		18	48	1	pce

Uponor S-Press battery charger

- Quick-charger for 18V Li-Ion batteries, 230 V
- Charging time: 1.3 Ah 15 min,
3.0 Ah 22 min
- Mains supply: 230 V AC
- Voltage range: 18 V
- Weight: 1,0 kg



Item no.	Dimension	OV V	Qty 2	Qty 1	UOM
35001083610*	Mini2, UP110	230	72	1	pce

Uponor Pressing

Uponor S-Press battery Mini

- Battery: 9.6V for Uponor battery pressing tool Mini KSP0.



Item no.	Dimension	OV V	Qty 2	Qty 1	UOM
35001015703		9,6	120	1	pce

Uponor S-Press jaw Mini KSP0

- Uponor pressing jaws MLC Mini KSP0



Item no.	Dimension	d mm	Qty 2	Qty 1	UOM
35001007091*	16	16	5	1	pce
35001007093*	20	20	5	1	pce
35001007094*	25	25	5	1	pce
35001007095*	32	32	5	1	pce

Uponor Accessories

Uponor Smart Aqua mounting rack bending tool

- For bending the 2 meter long mounting track.



Item no.	Dimension	Qty 2	Qty 1	UOM
35001015424	2m	100	1	pce

Uponor plastic pipe bend support

Made of impact resistant plastic as bend support 90° bends.



Item no.	Dimension	d mm	r mm	Qty 2	Qty 1	UOM
35001009004	16	16	90	2340	10	pce
35001009233	20	20	100	2340	10	pce

Uponor Galvanised Steel pipe bend support

Made of galvanised steel as bend support 90° bends.



Item no.	Dimension	d mm	r mm	Qty 2	Qty 1	UOM
35001009006	25 Galv. Steel	20	90	5000	20	pce



Uponor GmbH

P.O. Box 1641
97433 Hassfurt
Germany

Australia

T +49-(0)9521 690 0
F +49-(0)9521 690 750
E international@uponor.com

T +61 (0)7 3202 6831
M +61 (0)477 136 977
E international@uponor.com

