


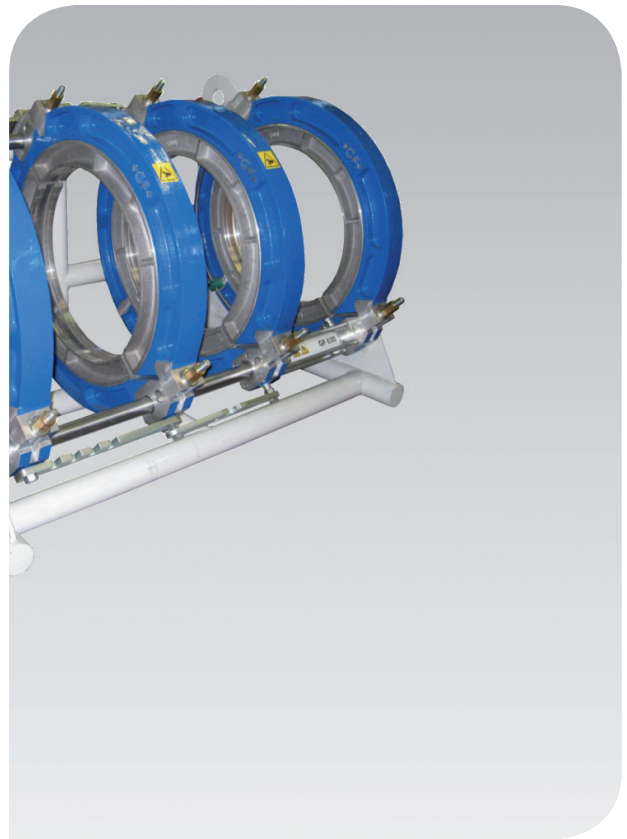


CNC automated
butt-fusion
machine line

GF 400 (125 – 400 mm)
GF 500 (200 – 500 mm)
GF 630 (315 – 630 mm)

Benefits

GF 400 - 500 - 630 CNC butt-fusion machines offer high quality and reliability in daily use, with an innovative user-friendly CNC control which guides the operator through the complete process.

The GF CNC machine line is designed for water as well as gas applications, providing high repetitive accuracy in jointing PE and PP according to the approved national guidelines or following freely programmable welding cycles by the operator.

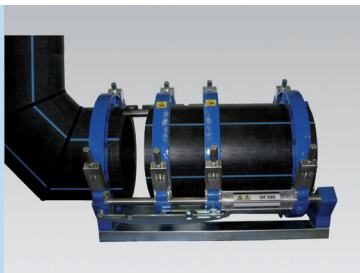

Flexibility

The sliding 3rd clamp of the base machine provides a time saving, flexible system for clamping bends and tees without additional tools.


The tilting design of the GF400 & 500 upper clamps allows quick and easy pipe fixation, alignment and removal.

Whenever necessary, the upper clamps may also be removed.



Simplicity

GF CNC hydraulic units incorporate intuitive touch-screen operator interface, all surrounded by a robust plastic housing. All hydraulic and electric connections are positioned on the rear panel and protected by the housing. Only one mains cable to the generator is required! Oil level control and refilling can be easily made without disassembling the unit. Users safety is assured by a locking mechanism and a micro switch preventing accidental operation of the planer motor.

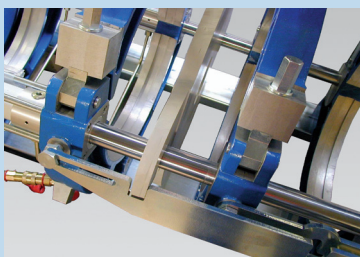

Quality

The base machines are equipped with a pull-off mechanism to separate the pipe ends safely from the heater plate. Optimised heat distribution on the PTFE coated heater plate ensures unified heat energy transfer into the pipe ends. By the use of the automated CNC machines, operator errors can be minimized and the jointing parameters can be traced.


Features

Continuous development in close collaboration with end users assures a state-of-the-art product range of butt-fusion machines.

The GF CNC line incorporates various clever features to simplify the operation of the equipment with extreme focus on operator safety and ensuring jointing quality and

reliability. These machines work hand in hand with the specialist on the construction site. For training and after sales service you can rely on the world-wide


network of service stations of GF Piping Systems.

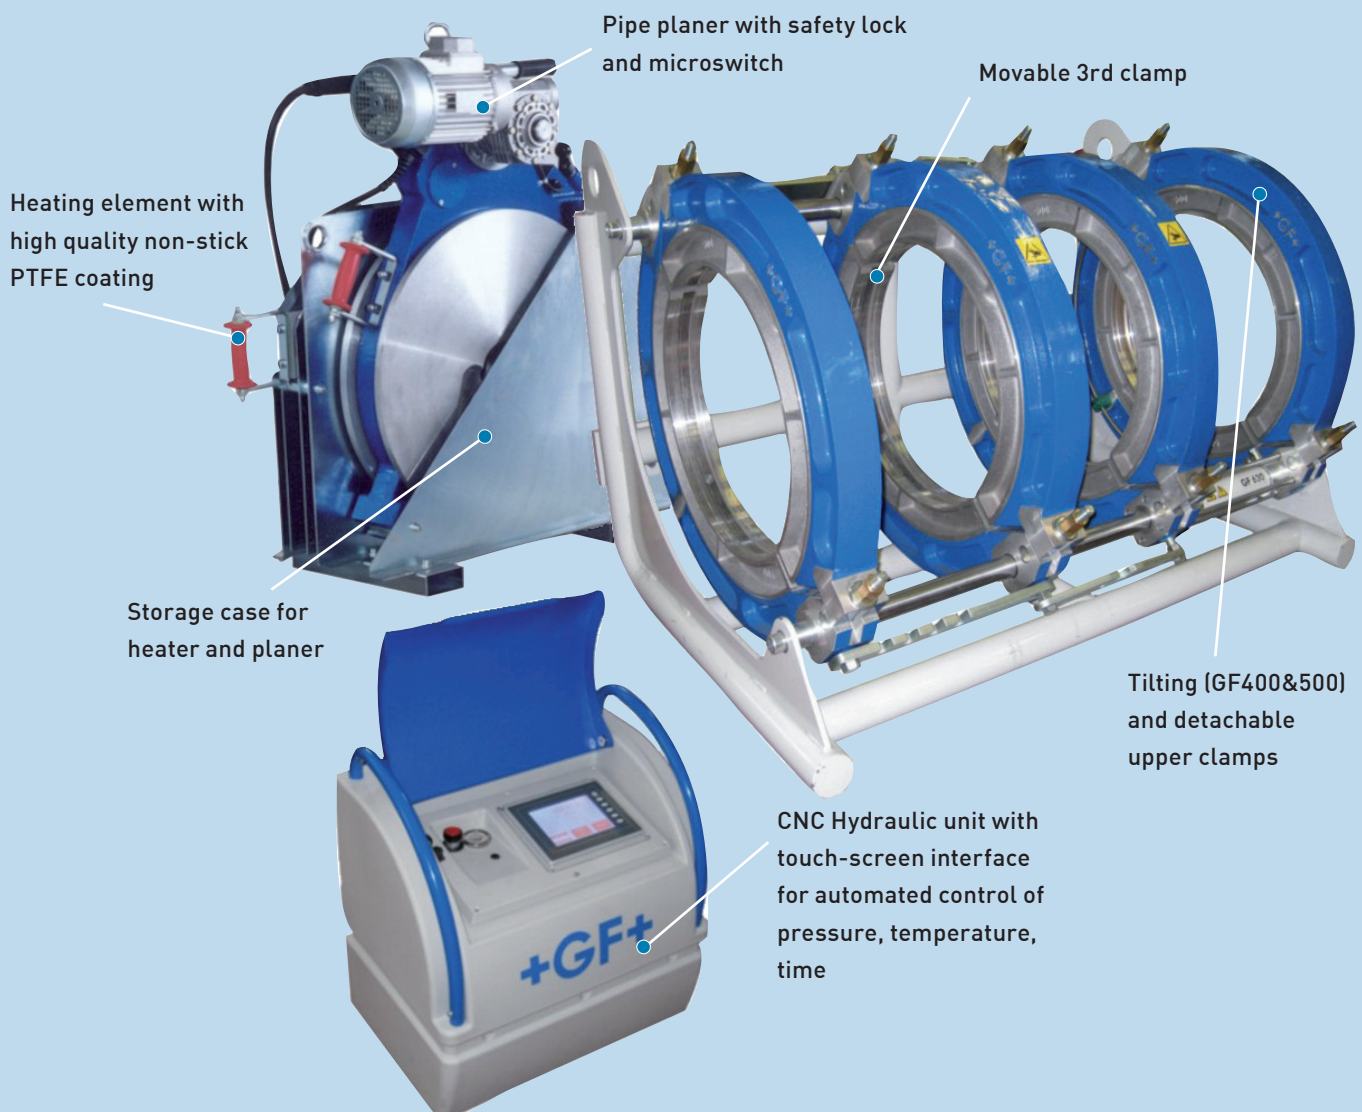

The system

At a glance

The GF CNC machine line performances are focused on safety, operative comfort and reliability of automated butt-fusion joining.

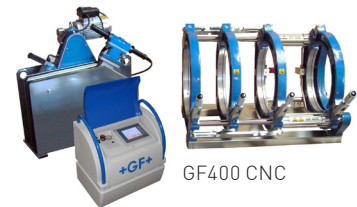

CNC Hydraulic unit


GF 400-500-630 CNC machines are equipped with innovative and user-friendly CNC hydraulic unit. With a distance measurement device mounted into the base machine all significant movements of the carriage are supervised during the process. The hydraulic unit is made with a robust inner aluminium case and protected by a shock adsorbing plastic housing.

The hydraulic unit distributes power to the planer and heating element, which are plugged in with high quality connectors.

The mains cable can be stored on a cable drum to simplify transportation of the unit. Oil level control and refilling is fast and easy without disassembling.



All connections on rear panel

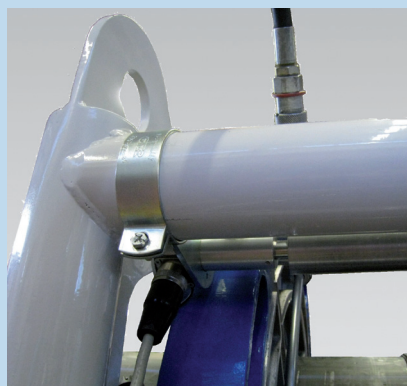

Potentiometer on base machine



Oil level check & refill

Details

The GF 400 – 500 – 630 CNC machines ensure high quality fusion cycles through automated process.

The GF CNC hydraulic control unit is designed to support the operator during the process with an easy interaction.



Touchscreen interface



GF CNC welding machine



USB memory key with cover

GF CNC machines guide the operator from the preparation to the end of the joining process by use of symbols and graphics.

The selection and input of welding and additional data (welding standard, material, diameter, SDR, operator ID, traceability data ISO 12176 - 4) is intuitive and time saving by using industrially proven touch screen technology.

The fusion parameters - pressure, time and temperature - are automatically calculated, regulated and controlled according to the selected country specific guidelines.

For non standard dimensions 10 free programmable welding cycles are available.

Various configuration possibilities, like automatic bead-build up phase, insertion of GPS coordinates, data input (operator ID, traceability pipe code...) via barcode scanner are available.

The preferred menu language can be chosen from a language set. The welding reports can be stored on a standard USB memory key, which is supplied with the machine as well as the SUVI WIN-WELD software, to be transferred to PC.


Preinstalled socket is provided for connection of barcode scanner to manage traceability data.



Barcode scanner (Optional)


Accessories

Each welding job is different and requires dedicated accessories to increase productivity before, during and after the fusion process.

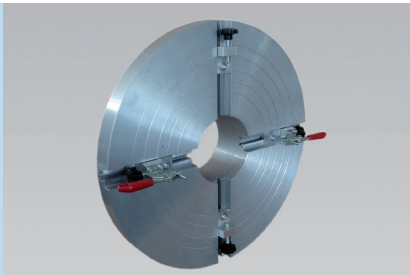

Flange adapter clamping unit

This accessory supports welding of short-end fittings (flanges) to pipes. Depending on the components to be joined, the stub-end holder can be fitted both on the outer clamp or the sliding 3rd clamp.

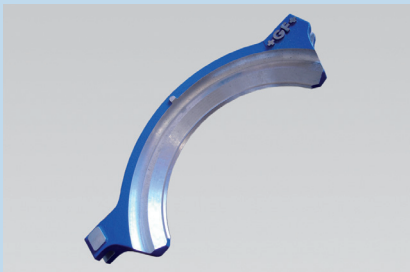


Chamfered upper clamps

This accessory is useful for welding short-leg bends having diameters equal to the maximum available for the machine: e.g. bend Ø 630 mm with a GF 630 machine.



Set of reduction inserts

For all three machines complete sets of reduction inserts are available, consisting of 4 narrow and 4 wide half rings of each dimension. The narrow half rings are generally used to fix short-leg fittings, while the wide ones enable also easy re-rounding of pipes.

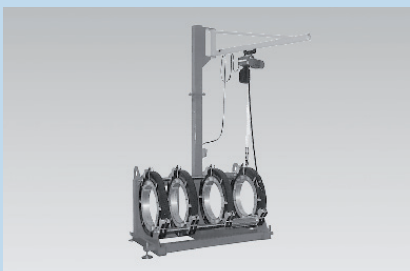

Hoist unit

For all three machines a complete hoist unit is available, consisting of frame to be fixed on the base machine and swiveling arm, for carrying planer and heating element. A weight compensator for GF400/500 and an electrical motor with 2 hoisting speeds for GF 630 are also available.

Technical data

The GF CNC family covers the pipe dimensions from Ø 125 mm to Ø 630 mm and is built to join pressure pipes for transportation of gas, water and other fluids.



Technical data	GF 400	GF 500	GF 630
Butt-fusion machine size	GF 400 CNC	GF 500 CNC	GF 630 CNC
Pipe diameter range (mm)	125-400	200-500	315-630
Power supply	3 phase 400V, 50 Hz		
Power rating [W]	5.700	6.300	11.000
Mains connector	CEI - 16A		
Net weight [kg]	205	480	615
Packaging dimension W/D/H [cm]	143x137x106	180x150x110	165x140x135

GF Piping Systems → worldwide at home

Our sales companies and representatives ensure local customer support in over 100 countries.

www.piping.georgfischer.com



The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Adding Quality to People's Lives

Argentina/Southern South America

Georg Fischer Central Plastics
Sudamérica S.R.L.
Buenos Aires, Argentina
Phone +5411 4512 02 90
gfccentral.ps.ar@georgfischer.com

Australia

George Fischer Pty Ltd
Riverwood NSW 2210 Australia
Phone +61(0)2 9502 8000
australia.ps@georgfischer.com
www.georgfischer.com.au

Austria

Georg Fischer
Rohrleitungssysteme GmbH
3130 Herzogenburg
Phone +43(0)2782 856 43-0
austria.ps@georgfischer.com
www.georgfischer.at

Georg Fischer Fittings GmbH
3160 Traisen
Phone +43 (0)2762 90300
fittings.ps@georgfischer.com
www.fittings.at

Belgium/Luxembourg

Georg Fischer NV/SA
1070 Bruxelles/Brüssel
Phone +32(0)2 556 40 20
be.ps@georgfischer.com
www.georgfischer.be

Brazil

Georg Fischer Ltda.
04795-100 São Paulo
Phone +55(0)11 5525 1311
br.ps@georgfischer.com
www.georgfischer.com.br

Canada

Georg Fischer Piping Systems Ltd
Brampton, ON L6T 4E3
Phone +1(905)792 8005
Fax +1(905)792 6667
www.georgfischer.ca
ca.ps@georgfischer.com

China

Georg Fischer
Piping Systems Ltd Shanghai
Pudong, Shanghai 201319
Phone +86(0)21 58 13 33 33
china.ps@georgfischer.com
www.georgfischer.cn

Chinaust Plastics Corp. Ltd.
Songlindian, Zhuozhou city,
Hebei province, China, 072761
Phone +86 312 395 2000
Fax +86 312 365 2222
chinaust@chinaust.com
www.chinaust.com.cn

Denmark/Iceland

Georg Fischer A/S
2630 Taastrup
Phone +45 (0)70 22 19 75
info.dk.ps@georgfischer.com
www.georgfischer.dk

Finland

Georg Fischer AB
01510 VANTAA
Phone +358 (0)9 586 58 25
Fax +358 (0)9 586 58 29
www.georgfischer.fi
info.fi.ps@georgfischer.com

France

Georg Fischer SAS
95932 Roissy Charles de Gaulle Cedex
Phone +33(0)1 41 84 68 84
fr.ps@georgfischer.com
www.georgfischer.fr

Germany

Georg Fischer GmbH
73095 Albershausen
Phone +49(0)7161 302-0
info.de.ps@georgfischer.com
www.georgfischer.de

India

Georg Fischer Piping Systems Ltd
400 076 Mumbai
Phone +91 224007 2001
in.ps@georgfischer.com
www.georgfischer.in

Italy

Georg Fischer S.p.A.
20063 Cernusco S/N (MI)
Phone +3902 921 861
it.ps@georgfischer.com
www.georgfischer.it

Georg Fischer TPA S.r.l.
IT-16012 Busalla (GE)
Phone +39 010 962 47 11
tpa.ps@georgfischer.com
www.georgfischer.it

Japan

Georg Fischer Ltd
556-0011 Osaka,
Phone +81(0)6 6635 2691
jp.ps@georgfischer.com
www.georgfischer.jp

Korea

Georg Fischer Piping Systems
Guro-3 dong, Guro-gu, Seoul, Korea
Phone +82(0)2 2081 1450
Fax +82(0)2 2081 1453
kor.ps@georgfischer.com
www.georgfischer.kr

Malaysia

Georg Fischer (M) Sdn. Bhd.
40460 Shah Alam, Selangor Darul Ehsan
Phone +60 (0)3 5122 5585
my.ps@georgfischer.com
www.georgfischer.my

Mexico/Northern Latin America

Georg Fischer S.A. de C.V.
Apodaca, Nuevo Leon
CP66636 Mexico
Phone +52 (81)1340 8586
Fax +52 (81)1522 8906
mx.ps@georgfischer.com
www.georgfischer.mx

Middle East

Georg Fischer Piping Systems
Dubai, United Arab Emirates
Phone +971 4 289 49 60
info.export@georgfischer.com
www.export.georgfischer.com

Netherlands

Georg Fischer N.V.
8161 PA Epe
Phone +31(0)578 678 222
nl.ps@georgfischer.com
www.georgfischer.nl

Georg Fischer WAGA NV
NL-8160 AG Epe
Phone +31 (0)578 678 378
waga.ps@georgfischer.com
www.waga.nl

Norway

Georg Fischer AS
1351 Rud
Phone +47(0)67 18 29 00
no.ps@georgfischer.com
www.georgfischer.no

Poland

Georg Fischer Sp. z o.o.
05-090 Sekocin Nowy
Phone +48(0)22 31 31 0 50
poland.ps@georgfischer.com
www.georgfischer.pl

Romania

Georg Fischer
Piping Systems Ltd
020257 Bucharest - Sector 2
Phone +40(0)21 230 53 80
ro.ps@georgfischer.com
www.export.georgfischer.com

Russia

Georg Fischer Piping Systems
Moscow 125047
Tel. +7 495 258 60 80
ru.ps@georgfischer.com
www.georgfischer.ru

Singapore

Georg Fischer Pte Ltd
528 872 Singapore
Phone +65(0)67 47 06 11
sgp.ps@georgfischer.com
www.georgfischer.sg

Spain/Portugal

Georg Fischer S.A.
280046 Madrid
Phone +34(0)91 781 98 90
es.ps@georgfischer.com
www.georgfischer.es

Sweden

Georg Fischer AB
117 43 Stockholm
Phone +46(0)8 506 775 00
info.se.ps@georgfischer.com
www.georgfischer.se
www.georgfischer.fi

Switzerland

Georg Fischer
Rohrleitungssysteme [Schweiz] AG
8201 Schaffhausen
Phone +41(0)52 631 30 26
ch.ps@georgfischer.com
www.piping.georgfischer.ch

Taiwan

Georg Fischer Piping Systems
San Chung City, Taipei Hsien
Phone +886 2 8512 2822
Fax +886 2 8512 2823
www.georgfischer.tw

United Kingdom/Ireland

Georg Fischer Sales Limited
Coventry, CV2 2ST
Phone +44(0)2476 535 535
uk.ps@georgfischer.com
www.georgfischer.co.uk

USA/Caribbean

Georg Fischer LLC
Tustin, CA 92780-7258
Phone +1(714) 731 88 00
Toll Free 800/854 40 90
us.ps@georgfischer.com
www.gfpiping.com

Georg Fischer Central Plastics LLC
Shawnee, OK 74801
Phone +1(405) 273 63 02
gfccentral.ps@georgfischer.com
www.centralplastics.com

International

Georg Fischer
Piping Systems [Switzerland] Ltd.
8201 Schaffhausen/Schaffhausen
Phone +41(0)52 631 30 03
Fax +41(0)52 631 28 93
info.export@georgfischer.com
www.export.georgfischer.com